


	8		7		6		5		4			3		2		1						
	Catalog Id		Conductor		r		Dimensions						-		Installation Tooling							
F	Without Flared Barrel (Fig-1)	With Flared Barrel (Fig-2)	AWG	Flex Conductor G,H,I,K,M & DLO	Expanded Cod. Range	Stud Size	OD	L	В	A	w	т	ØF	E	С	Color Code	Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	llsco ILC-12-N, ILC-12-H-N, ILCB-12	Huskie Model - EP-510C Die Index	Greeniee HK1240	Dieless	F
	98057NT	F98057NT	300	#4/0	300 - #2/0	1/2	0.81 [20.70]	4.41 [112.00]	1.06 [27.00]	2.99 [76.00]	0.81 [20.70]	0.15 [3.80]	0.61 [15.70]	0.52 [13.20]	1.75 [44.50]	White	U30RT U28ART	ILD-14 ILD - 66	HT41BE	KC12-300	Burndy Dieless - PAT444S & PAT4PC834LI. Ilsco Dieless -IDT-6, IDT-6H, IDTB-6, IDTB-6-LIO, TB-6DF1000-P,IDT-12-N, IVTB-6. Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID.	

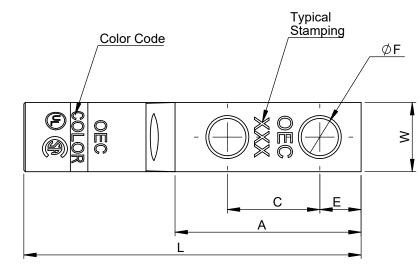

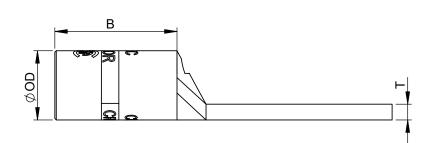

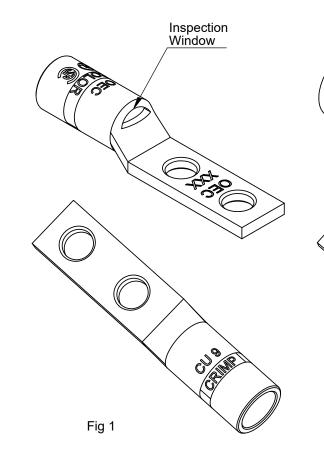

3

## Note:

Ε

D

С

\_\_\_\_

В

Α

- Manufactured from high strength seamless Copper tubing
- Color coded die index and crimp marks
- Electro-Tin plated for corrosion resistance
- Pre-filled with oxide inhibitor and capped with color coded cap.
- UL486A/B Listed for Wire Connectors
- UL Listed and CSA Certified with competitor's compression tools
- Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

## Crimping Instructions

• Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.

- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.

7

- Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.
- For Short Barrel Connectors, apply 1 crimp,
- For Long Barrel Connectors, apply 2 crimps on the color coded bands


THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

6

5

8

4

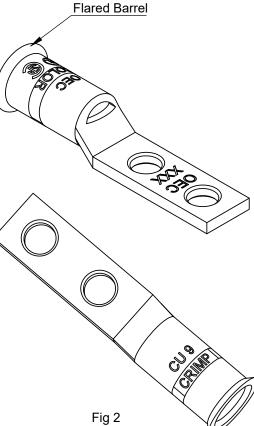

Ε

D

С

								I R		
			RANCE							
	OD	L	-	В	А	w	ØF			
	±0.20	±1	.0	±0.50	±0.50	±1.0	±0.20			
TOLERANCES-UNLESS OTHERWISE SPECIFIED		NAME R.P	DATE 28.02.25		OEC Usa Inc.					
2 PL. DEC. ±.015 TRUE C.L. ±.015	CHECK S	5.P.	28.02.25	10/ 10						
3 PL. DEC. ±.015 ANGLES ±.015	APPROVED 1	И.K.	28.02.25		<ul> <li>106 Northfield Avenue, Edison, NJ 08837,</li> <li>Phone: +1 732-479-0469 www.oec-americas.com</li> </ul>					
				Flione. +	1 732-479-0409					
DWG. NO. OC-0005			SIZE A3		TITLE: Copper Two Hole Standard Barrel Compression Lug					
MATERIAL Refer Note					Narrow Tang					
FINISH Refer Note	!				Cat Id. 98057NT REV					
	2					1		,		