


	8		7		6			5			4			3			2			1		
F	Catalog Id		Conductor			Dimensions							Installation Tooling									
	Without Flared Barrel (Fig-1)	With Flared Barrel (Fig-2)	AWG	Flex Conductor G,H,I,K,M & DLO	Expanded Cod. Range	Stud Size	OD	L	В	A	w	т	ØF	E	С	Color Code	Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	llsco IL ILC-12-H	_C-12-N, -N, ILCB-12	Huskie Model - EP-510C Die Index	Greeniee HK1240	Dieless
	98063BNT	3BNT F98063BNT	1000	750 (G,H,I,K) 100 - 750 777(DLO)	1/2	1.52 [38.80]	5.57 [141.50]	1.91 [48.50]	1.85 [47.00]	1.52 [38.80]	0.32 [8.40]	0.51 [13.00]	0.62 [15.70]	1.75 [44.50]	White	-	-	_	-	-	Burndy Dieless - PAT444S & PAT4PC834LI. Ilsco Dieless -IDT-6, IDT-6H, IDTB-6, IDTB-6-LIO, TB-6DF1000-P,IDT-12-N, IVTB-	, LIO,
	98063CNT	F98063CNT				5/8	1.52 [38.80]	5.57 [141.50]	1.91 [48.50]	1.85 [47.00]	1.52 [38.80]	0.32 [8.40]	0.67 [17.00]	0.62 [15.70]	1.75 [44.50]							6. Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID.

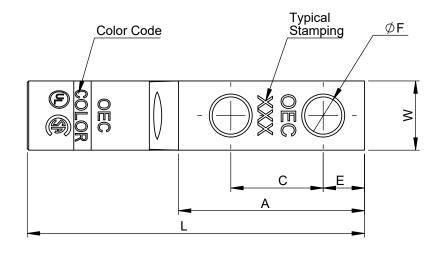

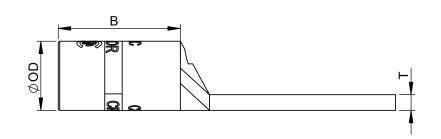

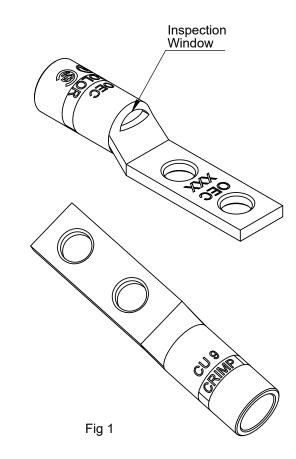

3

Note:

Ε

D

С

В

Α

- Manufactured from high strength seamless Copper tubing
- Color coded die index and crimp marks
- Electro-Tin plated for corrosion resistance
- Pre-filled with oxide inhibitor and capped with color coded cap.
- UL486A/B Listed for Wire Connectors
- UL Listed and CSA Certified with competitor's compression tools
- Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

Crimping Instructions

• Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.

- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.

7

• Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.

For Short Barrel Connectors, apply 1 crimp,

For Long Barrel Connectors, apply 2 crimps on the color coded bands


THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

6

5

8

4

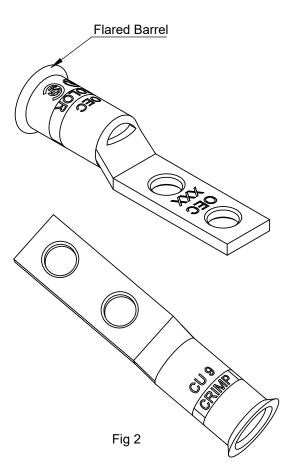

Ε

D

С

	TOLERANCE										
	OD	l	-	В	А	W	ØF				
	±0.20	±1.0		±0.50	±0.50	±1.0	±0.20				
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±015 TRUE C.L.±015 3 PL. DEC. ±015 ANGLES ±015	DRAWN CHECK APPROVED	NAME R.P S.P. M.K.	DATE 28.02.25 28.02.25 28.02.25		OE. orthfield Aven 1 732-479-0469	, NJ 08837,					
DWG. NO. OC-0005 MATERIAL Refer Note			SIZE A3	E	TITLE: Copper Two Hole Standard Barrel Compression Lug Narrow Tang						
FINISH Refer Note					Cat Id. 98063BNT - 98063CNT REV						
	2					1					