

F

E

D

C

B

A

F

E


D

C

B

A

Catalog Id		Conductor			Stud Size	Dimensions						Color Code	Installation Tooling					Dieless
Without Flared Barrel (Fig-1)	With Flared Barrel (Fig-2)	AWG	Flex Conductor G,H,I,K,M & DLO	Expanded Cod. Range		OD	L	B	A	W	T		Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	Ilscos ILC-12-N, ILC-12-H-N, ILCB-12		Huskie Model - EP-510C Die Index	Greenlee HK1240	
BT98011	FBT98011	#2	#4	#2 - #6	1/4	0.42 [10.70]	1.80 [45.60]	0.83 [21.00]	0.81 [20.60]	0.60 [15.30]	0.10 [2.60]	Brown	U2CRT	ILD-7	ILD - 33	HT41AW	KC12-2	Burndy Dieless - PAT444S & PAT4PC834LI.
BT98012	FBT98012				5/16	0.42 [10.70]	1.80 [45.60]	0.83 [21.00]	0.81 [20.60]	0.60 [15.30]	0.10 [2.60]							Ilscos Dieless -IDT-6, IDT-6H, IDTB-6, IDTB-6-LIO, TB-6DF1000-P, IDT-12-N, IVTB-6.
BT98013	FBT98013				3/8	0.42 [10.70]	1.80 [45.60]	0.83 [21.00]	0.81 [20.60]	0.60 [15.30]	0.10 [2.60]							Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID.
BT98013A	FBT98013A				1/2	0.42 [10.70]	1.80 [45.60]	0.83 [21.00]	0.81 [20.60]	0.71 [18.00]	0.08 [2.00]							

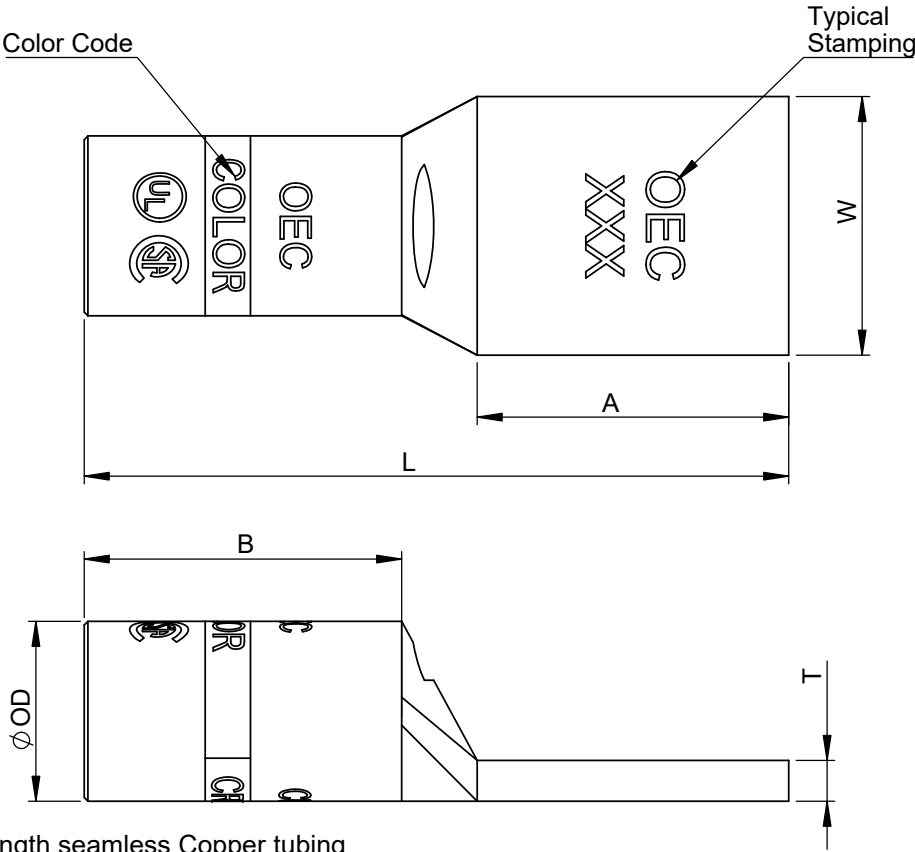

- Note:
- Manufactured from high strength seamless Copper tubing
 - Color coded die index and crimp marks
 - Electro-Tin plated for corrosion resistance
 - Pre-filled with oxide inhibitor and capped with color coded cap.
 - UL486A/B Listed for Wire Connectors
 - UL Listed and CSA Certified with competitor's compression tools
 - Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

Crimping Instructions

- Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.
- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.
- Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.
For Short Barrel Connectors, apply 1 crimp,
For Long Barrel Connectors, apply 2 crimps on the color coded bands

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

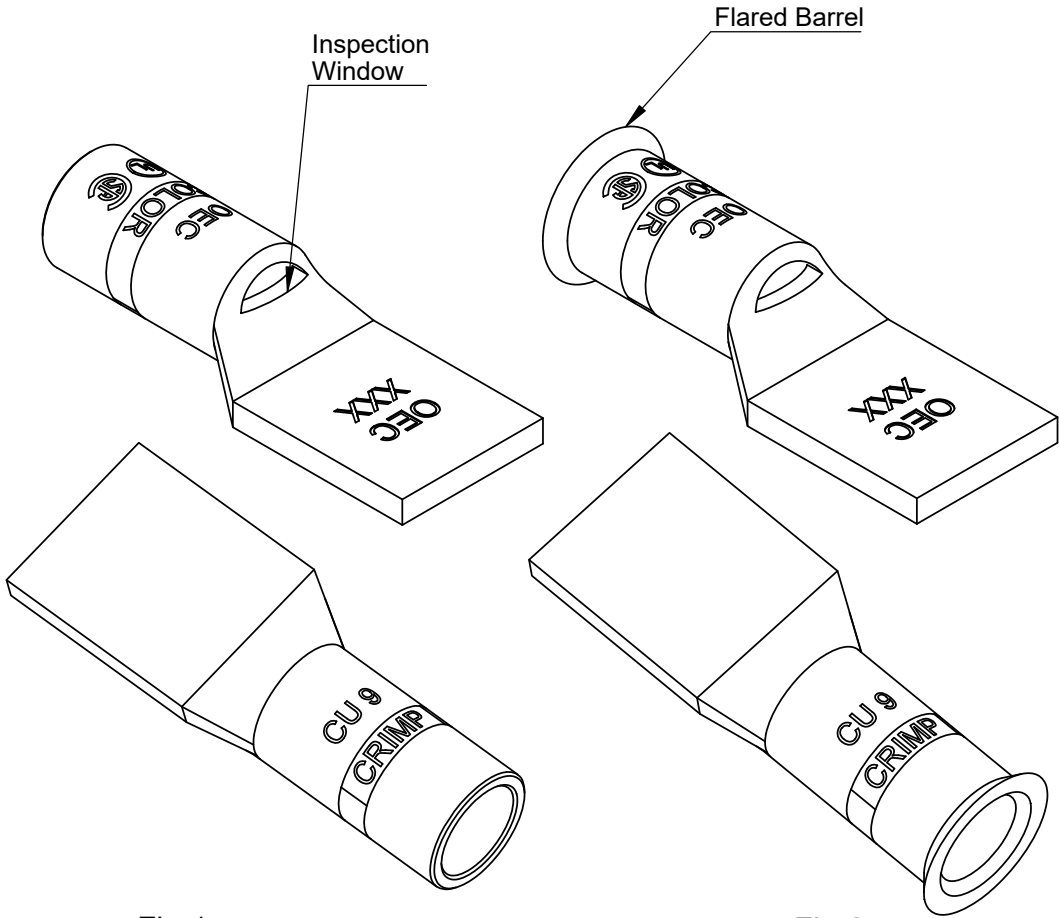


Fig-1

Fig-2

TOLERANCE				
OD	L	B	A	W
±0.20	±1.0	±0.50	±0.50	±1.0
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015			NAME DRAWN R.P. CHECK S.P. APPROVED M.K.	DATE 28.02.25 28.02.25 28.02.25
DWG. NO. OC-0003			PROJECTION: FIRST ANGLE	SIZE A3
MATERIAL Refer Note			TITLE: Copper One Hole Standard Barrel Compression Lug Blank Tang	
FINISH Refer Note			Cat Id. BT98011-BT98013A DO NOT SCALE DRAWING	REV SHEET 5 OF 19

OEC Usa Inc.
106 Northfield Avenue, Edison, NJ 08837,
Phone: +1 732-479-0469 www.oec-americas.com