| Catalog Id | | Dimensions | | | Mounting Number of Point |
|---|---|---|---|---|---|
| Bus Bar Assembly Natural | Bus Bar Assembly Tin-Plating | L | W | T | |
| OEC-CBB-G-0060214-U | OEC-CBB-G-0060214-T | 6.00 [152.40] | 2.00 [50.80] | 1/4 [6.35] | 6 |
| OEC-CBB-G-0080214-U | OEC-CBB-G-0080214-T | 8.00 [203.20] | | | 10 |
| OEC-CBB-G-0100214-U | OEC-CBB-G-0100214-T | 10.00 [254.00] | | | 14 |
| OEC-CBB-G-0120214-U | OEC-CBB-G-0120214-T | 12.00 [304.80] | | | 18 |
| OEC-CBB-G-0160214-U | OEC-CBB-G-0160214-T | 16.00 [406.40] | | | 26 |
| OEC-CBB-G-0180214-U | OEC-CBB-G-0180214-T | 18.00 [457.20] | | | 30 |
| OEC-CBB-G-0200214-U | OEC-CBB-G-0200214-T | 20.00 [508.00] | | | 34 |
| OEC-CBB-G-0240214-U | OEC-CBB-G-0240214-T | 24.00 [609.60] | | | 42 |
| OEC-CBB-G-0360214-U | OEC-CBB-G-0360214-T | 36.00 [914.40] | | | 66 |
| OEC-CBB-G-0360238-U | OEC-CBB-G-0360238-T | 36.00 [914.40] | | 3/8 [9.52] | 66 |
| OEC-CBB-G-0180314-U | OEC-CBB-G-0180314-T | 18.00 [457.20] | 3.00 [76.20] | 1/4 [6.35] | 30 |
| OEC-CBB-G-0240314-U | OEC-CBB-G-0240314-T | 24.00 [609.60] | | | 42 |
| OEC-CBB-G-0720314-U | OEC-CBB-G-0720314-T | 72.00 [1828.80] | | | 138 |
| OEC-CBB-G-0120312-U | OEC-CBB-G-0120312-T | 12.00 [304.80] | | 1/2 [12.70] | 18 |
| OEC-CBB-G-0100414-U | OEC-CBB-G-0100414-T | 10.00 [254.00] | 4.00 [101.60] | 1/4 [6.35] | 14 |
| OEC-CBB-G-0120414-U | OEC-CBB-G-0120414-T | 12.00 [304.80] | | | 18 |
| OEC-CBB-G-0180414-U | OEC-CBB-G-0180414-T | 18.00 [457.20] | | | 30 |
| OEC-CBB-G-0200414-U | OEC-CBB-G-0200414-T | 20.00 [508.00] | | | 34 |
| OEC-CBB-G-0240414-U | OEC-CBB-G-0240414-T | 24.00 [609.60] | | | 42 |
| OEC-CBB-G-0360414-U | OEC-CBB-G-0360414-T | 36.00 [914.40] | | | 70 |
| OEC-CBB-G-0480414-U | OEC-CBB-G-0480414-T | 48.00 [1219.20] | | | 90 |
| OEC-CBB-G-0600414-U | OEC-CBB-G-0600414-T | 60.00 [1524.00] | | | 114 |
| OEC-CBB-G-0800414-U | OEC-CBB-G-0800414-T | 80.00 [2032.00] | | | 154 |
| OEC-CBB-G-0960414-U | OEC-CBB-G-0960414-T | 96.00 [2438.40] | | | 186 |
| OEC-CBB-G-0080414-U | OEC-CBB-G-0080414-T | 8.00 [203.20] | | | 10 |
| OEC-CBB-G-0120438-U | OEC-CBB-G-0120438-T | 12.00 [304.80] | | 3/8 [9.52] | 18 |
| OEC-CBB-G-0120412-U | OEC-CBB-G-0120412-T | 12.00 [304.80] | | 1/2 [12.70] | 18 |
| OEC-CBB-G-0160438-U | OEC-CBB-G-0160438-T | 16.00 [406.40] | | 3/8 [9.52] | 26 |
| OEC-CBB-G-0200438-U | OEC-CBB-G-0200438-T | 20.00 [508.00] | | | 34 |
| OEC-CBB-G-0480438-U | OEC-CBB-G-0480438-T | 48.00 [1219.20] | | | 50 |
| OEC-CBB-G-0120614-U | OEC-CBB-G-0120614-T | 12.00 [304.80] | 6.00 [152.40] | 1/4 [6.35] | 18 |
| OEC-CBB-G-0180614-U | OEC-CBB-G-0180614-T | 18.00 [457.20] | | | 30 |
| OEC-CBB-G-0300612-U | OEC-CBB-G-0300612-T | 30.00 [762.00] | | 1/2 [12.70] | 54 |
| OEC-CBB-G-0200812-U | OEC-CBB-G-0200812-T | 20.00 [508.00] | 8.00 [203.20] | | 34 |

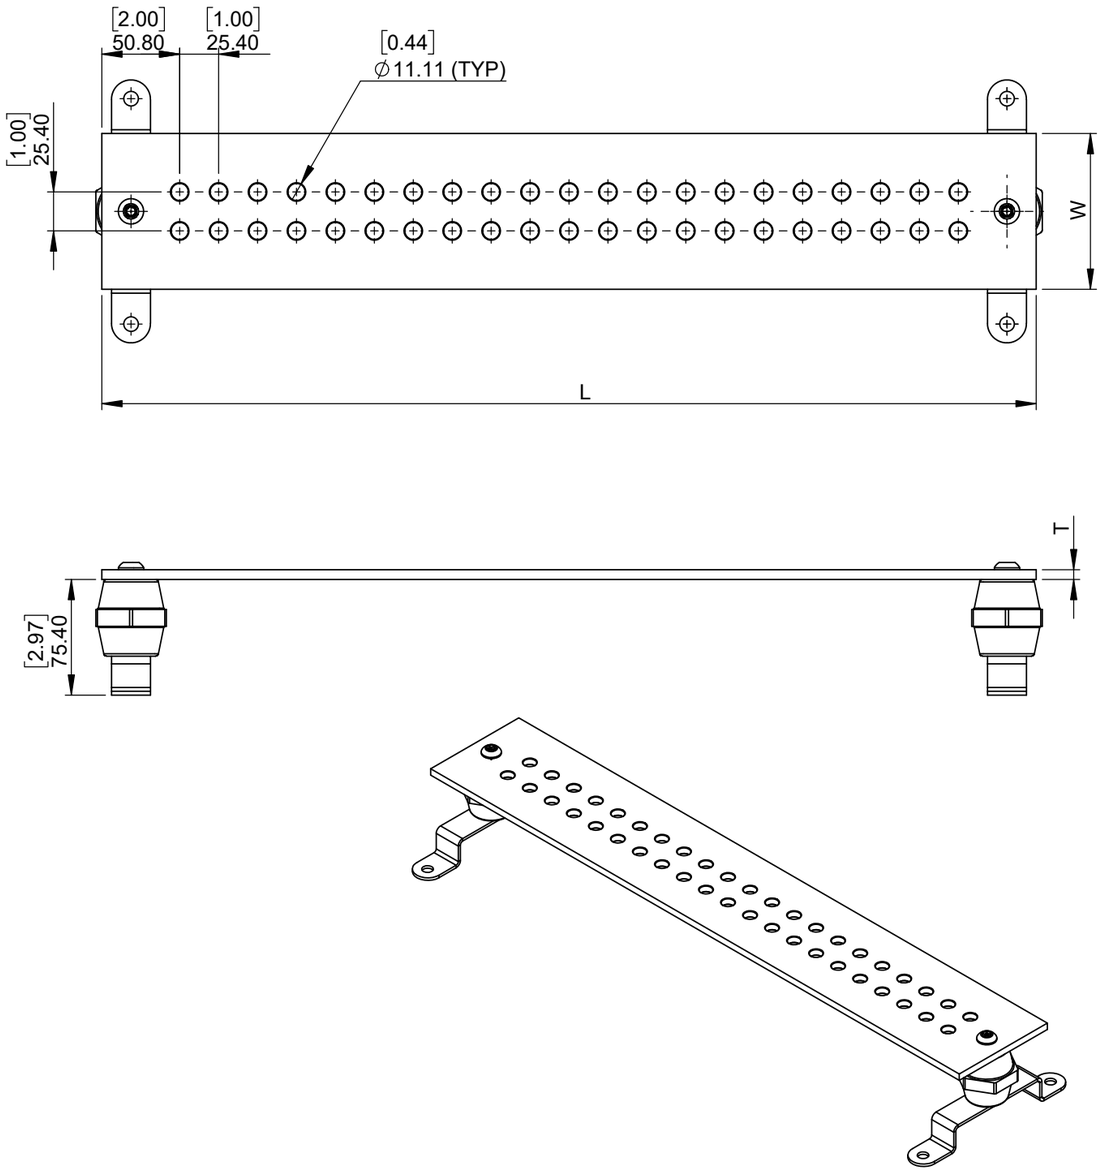


Note:

- Manufactured from Standard Material Copper
- Assembled With Tamper Proof Bolts And Insulators
- UL Listed
- All Bars Available With Electro Tin Plating / Natural
- All Holes Are 7/16" Unless Otherwise Specified

| TOLERANCE | | |
|---|---|---|
| L | W | T |
| ±1.00 | ±1.00 | ±0.20 |

TOLERANCES-UNLESS OTHERWISE SPECIFIED
2 PL. DEC. ±.015 TRUE C.L. ±.015
3 PL. DEC. ±.015 ANGLES ±.015

| | NAME | DATE |
|---|---|---|
| DRAWN | R.P | 05.03.25 |
| CHECK | S.P. | 05.03.25 |
| APPROVED | M.K. | 05.03.25 |

OEC Usa Inc.
106 Northfield Avenue, Edison, NJ 08837,
Phone: +1 732-479-0469 www.oec-americas.com

DWG. NO. OB-0007
PROJECTION: FIRST ANGLE
SIZE A3
TITLE: Bus Bar Assembly Pattern "GG"
MATERIAL Refer Note
FINISH Refer Note
Cat Id. OEC-CBBGG-0060214 - OEC-CBBGG-0200812 REV
DO NOT SCALE DRAWING SHEET 1 OF 1

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT