

Aluminum, Panelboard Lug, Two Conductor, I-Beam Style Dual Rated (AL9CU)

Features

- Manufactured from high strength aluminum alloy
- Chamfered entry
- Electro-Tin plated for corrosion resistance
- UL486A/B Listed for Wire Connectors
- CSA certified to standard 22.2
- Suitable for use with either copper or aluminum conductors
- Provides low contact resistance
- Saves time and provides ease of installation
- Stacked design

Standard Material

- Aluminum

Standard Finish




- Electro-tin plated

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

We Supply

- Suffix "-1/4", "-5/16", "-3/8", "-1/2", "-5/8", for special mounting stud holes.

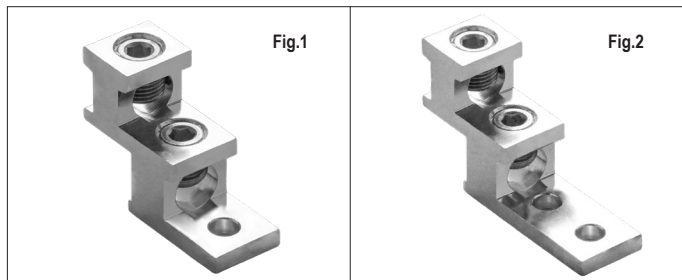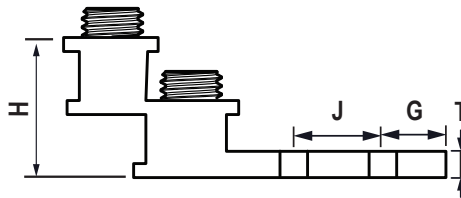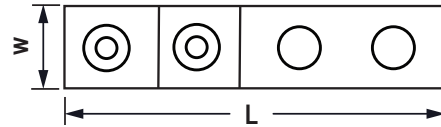

For Aluminum and Copper Conductors

Catalog ID	Fig. No.	Conductor Range	Bolt Size	Dimensions In Inches						Wrench Style		Torque in (lbs)
				L	W	H	T	J	G			
99952	1	1/0-14	3/8	2.03	0.63	1.41	0.19	0.39	0.44	Slotted		120
99953		2/0-14	3/8	2.03	0.63	1.41	0.19	0.39		Allen Hex		120
99954		250-6	3/8	2.81	0.90	2.16	0.27	0.39		Allen Hex		400
99954B		250-6	5/16	2.99	1.06	2.18	0.29	0.39		Allen Hex		275
99954BS		250-6	5/16	2.99	1.06	2.18	0.29	0.39		Allen Hex		275
99955		350-6	3/8	3.75	1.49	2.16	0.35	0.39		Allen Hex		275
99956		500-4	3/8	3.75	1.49	2.16	0.35	0.39		Allen Hex		531
99957		600-2	3/8	3.75	1.49	2.16	0.35	0.59		Allen Hex		500
99958		750-1/0	3/8	3.75	1.49	2.99	0.47	0.39		Allen Hex		796
99952A	2	1/0-14	3/8	3.03	0.63	1.41	0.19	1.00		Allen Hex		120
99953A		2/0-14	3/8	0.03	0.63	1.41	0.19	1.00		Allen Hex		120
99954A		250-6	3/8	3.81	0.98	2.16	0.27	1.00		Allen Hex		400
99955A		350-6	3/8	3.81	1.06	2.16	0.27	1.00		Allen Hex		275
99956A		500-4	3/8	4.92	1.49	2.16	0.35	1.00		Allen Hex		531
99957A		600-2	3/8	4.92	1.49	2.16	0.35	1.00		Allen Hex		500
99958A		750-1/0	3/8	4.92	1.49	2.99	0.47	1.00		Allen Hex		796

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

We suggest using an oxide inhibitor for every aluminum termination.