

Aluminum, Lay In Lug

Features

- Lay in feature
- Easy to installation
- Manufactured from high strength aluminum
- Tin plating for corrosion resistance
- Provides ease of installation of continuous loop grounding conductor
- Suitable for direct burial and for use with copper and aluminum conductors
- Resists oxidation and corrosion in earth or concrete

Standard Material


- Aluminum

Standard Finish

- Tin plated

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

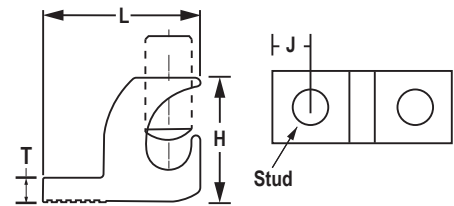

Catalog ID	Conductor Range	Bolt Size	Dimensions In Inches				Strip Length	Wrench Style	
			L	W	H	J			
50041A	4-14 Str (CU) 8-4 Str (AL)	#10	1.06	0.37	0.75	0.188	0.75	Slotted	
50041AS									
50041AS26									
50042A	1/0-14 Str (CU) 1/0-8 Str (AL)	1/4	1.50	0.60	1.16	0.300	0.75		
50042AS									
50043A	3/0-6 Str (CU) 3/0-6 Str (AL)	5/16	2.00	0.78	1.50	0.423	1.00	Allen Hex	
50043AS									
50044A	250-6 AWG (CU) 250-6 AWG (AL)	5/16	2.20	0.80	1.70	0.423		Allen Hex	
50044AS									
50041GS	4-14 Str (CU) 4-12 Str (AL)	#10	1.06	0.50	0.50	0.423	0.75	Allen Hex	

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
We suggest using an oxide inhibitor for every aluminum termination.