

Aluminum, Neutral Bar Dual Rated (AL9CU)

Features

- Manufactured from high strength aluminum alloy
- Electro-Tin plated for corrosion resistance
- UL486A/B Listed for Wire Connectors
- UL467 Listed for grounding and bonding applications
- CSA certified to standard 22.2
- Suitable for use with either copper or aluminum conductors
- Provides low contact resistance

Standard Material


- Aluminum

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

Standard Finish

- Electro-tin plated

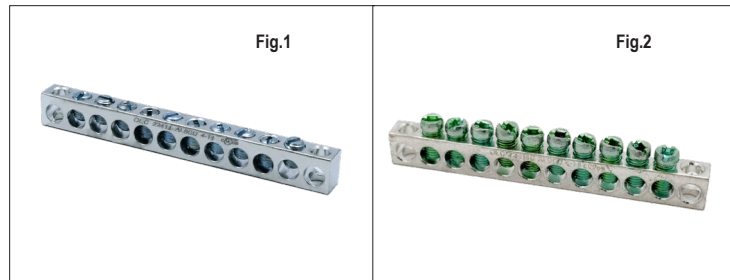

NOTE : All categories are followed by single digit numeric (0-9) and followed by two digit numeric (0-99) as per mounting hole position



For Use on Aluminum & Copper Conductor (AL9CU)

Catalog ID	Fig. No.	Conductor Range		No Of Holes	No Of Circuit	Mounting Holes Position	Dimensions In Inches			Wrench Style	
		Copper	Aluminum				Length	Width	Height		
22401	1	4-14	4-8	3	2	2	0.95	0.31	0.44	Slotted	●
22401G	2	8-14	8-12	3	2	2	0.95	0.31	0.44	Robertson	⊕
22402	1	4-14	4-8	5	4	3	1.57	0.31	0.44	Slotted	●
22402G	2	8-14	8-12	5	4	3	1.57	0.31	0.44	Robertson	⊕
22403	1	4-14	4-8	6	5	3	1.88	0.31	0.44	Slotted	●
22403G	2	8-14	8-12	6	5	3	1.88	0.31	0.44	Robertson	⊕
22404	1	4-14	4-8	7	6	4	2.25	0.31	0.44	Slotted	●
22404G	2	8-14	8-12	7	6	4	2.25	0.31	0.44	Robertson	⊕
22405	1	4-14	4-8	6	4	1-4	1.88	0.31	0.44	Slotted	●
22405G	2	8-14	8-12	6	4	1-4	1.88	0.31	0.44	Robertson	⊕
22406	1	4-14	4-8	7	5	1-7	2.25	0.31	0.44	Slotted	●
22406G	2	8-14	8-12	7	5	1-7	2.25	0.31	0.44	Robertson	⊕
22407	1	4-14	4-8	7	5	2-6	2.25	0.31	0.44	Slotted	●
22407G	2	8-14	8-12	7	5	2-6	2.25	0.31	0.44	Robertson	⊕
22408	1	4-14	4-8	8	6	4-7	2.56	0.31	0.44	Slotted	●
22408G	2	8-14	8-12	8	6	4-7	2.56	0.31	0.44	Robertson	⊕
22409	1	4-14	4-8	9	7	3-7	2.87	0.31	0.44	Slotted	●
22409G	2	8-14	8-12	9	7	3-7	2.87	0.31	0.44	Robertson	⊕
22410	1	4-14	4-8	11	9	1-11	3.50	0.31	0.44	Slotted	●
22410G	2	8-14	8-12	11	9	1-11	3.50	0.31	0.44	Robertson	⊕
22411	1	4-14	4-8	12	10	1-12	3.81	0.31	0.44	Slotted	●
22411G	2	8-14	8-12	12	10	1-12	3.81	0.31	0.44	Robertson	⊕
22412	1	4-14	4-8	14	12	1-14	4.43	0.31	0.44	Slotted	●
22412G	2	8-14	8-12	14	12	1-14	4.43	0.31	0.44	Robertson	⊕
22413	1	4-14	4-8	17	15	1-17	5.37	0.31	0.44	Slotted	●
22413G	2	8-14	8-12	17	15	1-17	5.37	0.31	0.44	Robertson	⊕
22414	1	4-14	4-8	22	20	1-22	6.93	0.31	0.44	Slotted	●
22414G	2	8-14	8-12	22	20	1-22	6.93	0.31	0.44	Robertson	⊕
22415	1	4-14	4-8	190	190	-	60.0	0.31	0.44	Slotted	●
22415G	2	8-14	8-12	190	190	-	60.0	0.31	0.44	Robertson	⊕
22416	1	4-14 8-14	4-8 8-12	12	10	3-11	4.12	0.38	0.50	Slotted	●
22417	1	2/0-14 8-14	2/0-8 8-12	3	2	2	1.75	0.56	0.75	Allen Hex	⬢
22418				5	3	2-4	2.95	0.56	0.75	Allen Hex	⬢
22419				8	6	1-8	4.75	0.56	0.75	Allen Hex	⬢

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

We suggest using an oxide inhibitor for every aluminum termination.