

Copper, Neutral Bar

Features

- Manufactured from high strength Copper alloy
- Electro-Tin plated for corrosion resistance
- UL486A/B Listed for Wire Connectors
- UL467 Listed for grounding and bonding applications
- CSA certified to standard 22.2
- Suitable for use with copper conductors
- Provides low contact resistance

Standard Material


- Copper

Standard Finish

- Natural

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

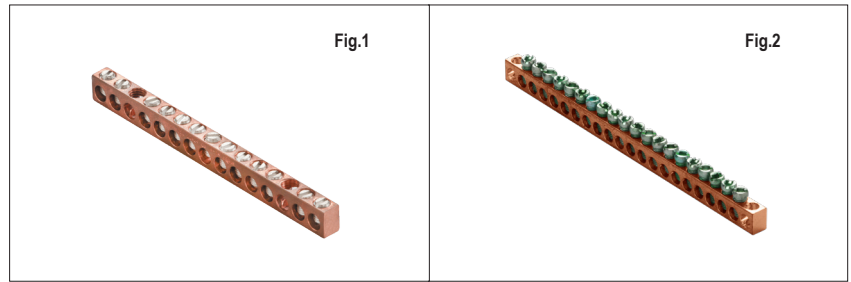

For Use on Copper Conductor

Catalog ID	Fig. No.	Conductor Range	No Of Holes	No Of Circuit	Dimensions In Inches			Wrench Style	
		Copper			Length	Width	Height		
22420	1	4-14	6	4	1.94	0.31	0.44	Slotted	
22420G	2	8-14						Robertson	
22421	1	4-14	7	5	2.25	0.31	0.44	Slotted	
22421G	2	8-14						Robertson	
22422	1	4-14	8	6	2.56	0.31	0.44	Slotted	
22422G	2	8-14						Robertson	
22423	1	4-14	14	12	4.43	0.31	0.44	Slotted	
22423G	2	8-14						Robertson	
22424	1	4-14	15	13	4.74	0.31	0.44	Slotted	
22424G	2	8-14						Robertson	
22425	1	4-14	15	13	4.74	0.31	0.44	Slotted	
22425G	2	8-14						Robertson	
22426	1	4-14	190	190	60.0	0.31	0.44	Slotted	
22426G	2	8-14						Robertson	
22427	1	4-14	5	3	2.00	0.38	0.50	Slotted	
22427G	2	8-14						Robertson	
22428	1	4-14	8	6	3.25	0.38	0.50	Slotted	
22428G	2	8-14						Robertson	

NOTE : All categories are followed by single digit numeric (0-9) and followed by two digit numeric (0-99) as per mounting hole position

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

We suggest using an oxide inhibitor for every aluminum termination.