

Copper, Mechanical Offset Lug, One Conductor

Features

- Manufactured from high strength copper alloy
- Electro-Tin plated for corrosion resistance
- Range taking
- UL486 A/B Listed for Wire Connectors
- Rated for copper conductor only
- Provides maximum conductivity and strength

Standard Material

- Copper

Standard Finish



- Natural

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

NOTE

- Used Suffix 'T' for Tin Plating Item : 21XXXXT

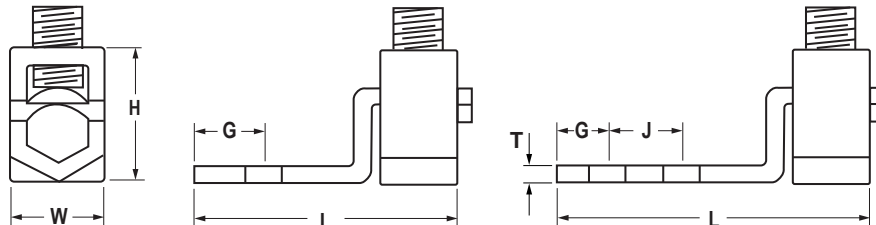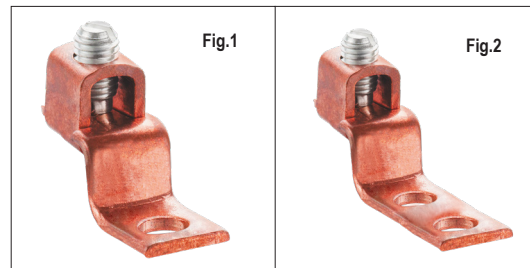

Catalog ID	Fig No.	Conductor Range	Bolt Size	Dimensions In Inches						Wrench Style		Torque in (lbs)
				L	W	H	T	J	G			
21000	1	10-14	#10	0.94	0.25	0.35	0.06	-	0.20	Slotted		35
21001		6-14	#10	1.29	0.38	0.50	0.62	-	0.23	Slotted		35
21001A		10-14	#10	1.29	0.38	0.50	0.62	-	0.23	Slotted		50
21002		4-14	1/4	1.37	0.50	0.56	0.07	-	0.25	Slotted		35
21003		2-12	1/4	1.55	0.50	0.65	0.07	-	0.25	Allen Hex		50
21004		1/0-8	1/4	1.94	0.63	0.82	0.11	-	0.32	Allen Hex		120
21004A		1/0-2	1/4	1.94	0.63	0.82	0.11	-	0.32	Allen Hex		150
21005		3/0-4	3/8	2.20	0.75	1.03	0.11	-	0.43	Allen Hex		120
21006		4/0-6	5/16	2.61	0.98	1.17	0.11	-	0.48	Allen Hex		200
21006A		4/0-2	5/16	2.61	0.98	1.17	0.11	-	0.48	Allen Hex		150
21007		350-1/0	3/8	3.30	0.98	1.40	0.18	-	0.51	Allen Hex		275
21008		500-4/0	3/8	4.25	1.50	1.63	0.18	-	0.93	Allen Hex		275
21008A		500-1/0	3/8	4.25	1.50	1.63	0.18	-	0.93	Allen Hex		275
21009		1000-600	1/2	4.84	2.00	2.30	0.24	-	1.16	Allen Hex		375
21001DS	2	6-14	#10	2.28	0.38	0.50	0.62	1.00	0.23	Slotted		35
21001ADS		10-14	#10	2.28	0.38	0.50	0.62	1.00	0.23	Slotted		50
21002DS		4-14	1/4	2.36	0.50	0.56	0.07	1.00	0.25	Slotted		35
21003DS		2-12	1/4	2.53	0.50	0.65	0.07	1.00	0.25	Allen Hex		50
21004DS		1/0-8	1/4	0.43	0.63	0.82	0.11	1.00	0.32	Allen Hex		150
21004ADS		1/0-2	1/4	0.93	0.63	0.82	0.11	1.00	0.32	Allen Hex		150
21005DS		3/0-4	3/8	3.18	0.75	1.03	0.11	1.00	0.43	Allen Hex		250
21006DS		4/0-6	5/16	3.60	0.98	1.17	0.11	1.00	0.48	Allen Hex		150
21006ADS		4/0-2	5/16	3.60	0.98	1.17	0.11	1.00	0.48	Allen Hex		150
21007DS		350-1/0	3/8	4.29	0.98	1.40	0.18	1.00	0.51	Allen Hex		275
21008DS		500-4/0	3/8	5.23	1.50	1.63	0.18	1.00	0.93	Allen Hex		275
21008ADS		500-1/0	3/8	5.23	1.50	1.63	0.18	1.00	0.93	Allen Hex		275
21009DS		1000-600	1/2	5.82	2.00	2.30	0.24	1.00	1.16	Allen Hex		375

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)