





Bronze, Mechanical Lug, One Conductor

- Features**
- Manufactured from high strength copper alloy
 - Range taking
 - UL486 A/B Listed for Wire Connectors
 - Rated for copper conductor only
 - Provides maximum conductivity and strength

- Standard Material**
- Copper

- Standard Finish**
- Natural

- Electrical Rating**
- Voltage Rating: 600 V
 - Maximum Circuit Rating: 35 kV
 - Temperature Rating: 90°C

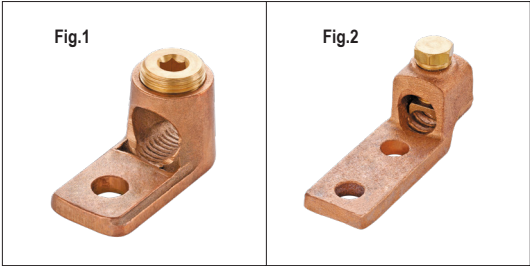

Catalog ID	Fig. No.	Conductor Range	Bolt Size	Dimensions In Inches						Wrench Style		Torque in (lbs)
				L	W	H	T	J	G			
22503	1	1/0-4	5/16	1.65	0.78	0.88	0.14	-	0.41	Allen Hex		225
22504		350-1/0	3/8	2.44	1.10	1.47	0.35	-	0.62	Allen Hex Bolt		325
22505		500-4/0	1/2	2.75	1.34	1.68	0.41	-	0.62			400
22506		1000-500	1/2	3.54	1.87	2.46	0.51	-	0.70			708
22507	2	1/0-4	5/16	2.83	0.78	0.88	0.19	1.00	0.41	Allen Hex		225
22508		350-1/0	1/2	4.48	1.10	1.47	0.35	1.75	0.62	Allen Hex Bolt		325
22509		500-300	1/2	4.64	1.34	1.68	0.41	1.75	0.62			400
22510		1000-500	1/2	5.05	1.87	2.46	0.55	1.75	0.62			708

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)