

Bronze, Mechanical Lug, Two and Three Conductor

Features

- Manufactured from high strength copper alloy
- Range taking
- UL486 A/B Listed for Wire Connectors
- Rated for copper conductor only
- Provides maximum conductivity and strength

Standard Material



- Copper

Standard Finish

- Natural

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

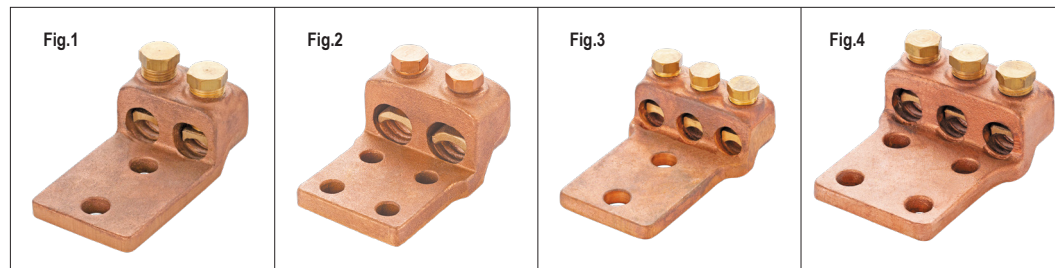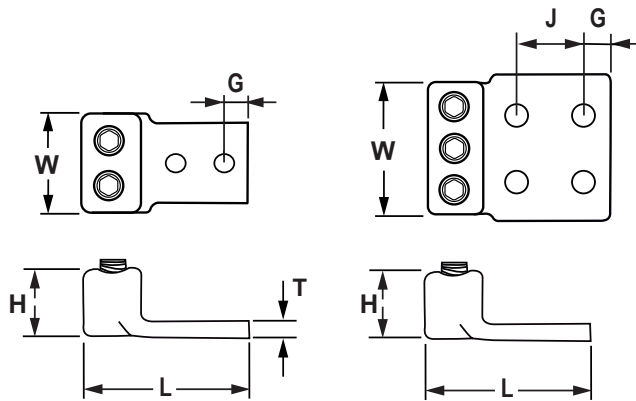

Catalog ID	Fig. No.	Conductor Range	Bolt Size	Dimensions In Inches						Wrench Style		Torque in (lbs)
				L	W	H	T	J	G			
22511	1	1/0-4	5/16	2.71	1.47	0.88	0.19	1.00	0.41	Hex		225
22512		350-1/0	1/2	4.48	1.92	1.47	0.35	1.75	0.62			325
22513		500-300	1/2	4.64	2.38	1.68	0.41	1.75	0.62			375
22514		1000-500	1/2	5.03	3.58	2.46	0.53	1.75	0.62			708
22515	2	1/0-4	5/16	2.71	1.47	0.88	0.19	1.00	0.41	Hex		225
22516		350-1/0	1/2	4.48	2.83	1.47	0.35	1.75	0.62			325
22517		500-300	1/2	4.64	3.03	1.68	0.41	1.75	0.62			375
22518		1000-500	1/2	5.03	3.56	2.46	0.51	1.75	0.62			708
22519	3	1/0-4	5/16	2.71	2.16	0.88	0.19	1.00	0.41	Hex		225
22520		350-1/0	3/8	4.48	2.88	0.56	0.35	1.75	0.62			325
22521		500-300	1/2	4.64	3.54	1.68	0.41	1.75	0.62			375
22522		1000-500	1/2	5.03	5.31	2.46	0.51	1.75	0.62			708
22523	4	1/0-4	5/16	2.71	2.16	0.88	0.19	1.00	0.41	Hex		225
22524		1/0-4	1/2	4.48	2.88	1.47	0.35	1.75	0.62			325
22525		500-300	1/2	4.64	3.54	1.68	0.41	1.75	0.62			375
22526		1000-500	1/2	5.03	5.31	2.46	0.51	1.75	0.62			708

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)