

Bronze, Mechanical Lug, Four Conductor

Features

- Manufactured from high strength copper alloy
- Range taking
- UL486 A/B Listed for Wire Connectors
- Rated for copper conductor only
- Provides maximum conductivity and strength

Standard Material



- Copper

Standard Finish

- Natural

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

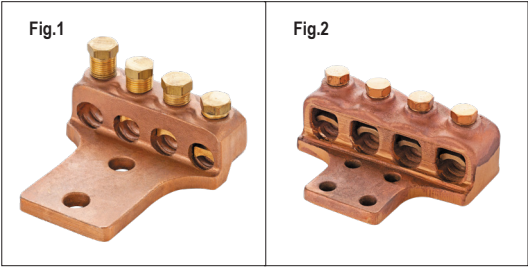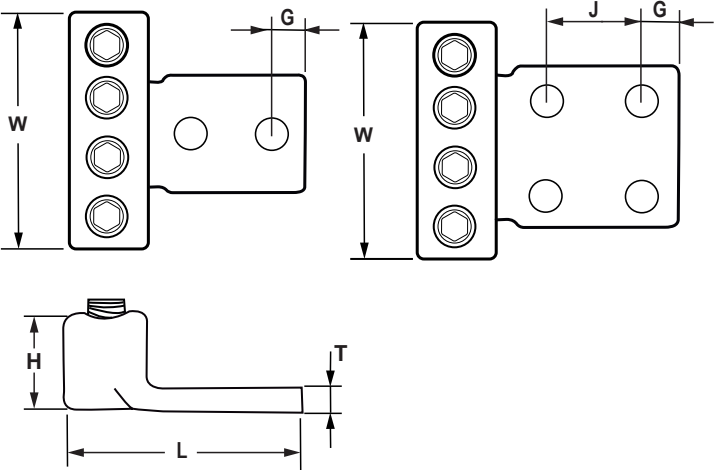

Catalog ID	Fig. No.	Conductor Range	Bolt Size	Dimensions In Inches						Wrench Style		Torque in (lbs)
				L	W	H	T	J	G			
22527	1	1/0-4	5/16	2.71	2.85	0.88	0.19	1.00	0.41	Hex		225
22528		350-1/0	1/2	4.48	3.85	1.47	0.35	1.75	0.62			325
22529		500-300	1/2	4.65	4.70	1.68	0.41	1.75	0.62			375
22530		1000-500	1/2	5.03	7.00	0.09	0.51	1.75	0.62			708
22531	2	1/0-4	5/16	2.71	2.85	0.88	0.19	1.00	0.41	Hex		225
22532		350-1/0	3/8	4.48	3.85	1.47	0.35	1.75	0.62			325
22533		500-300	1/2	4.65	4.70	1.68	0.41	1.75	0.62			375
22534		1000-500	1/2	5.03	7.00	0.09	0.51	1.75	0.62			708

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)