

Insulated Multi-Tap Connectors Single Sided Entry with Mounting

Features

- Insulated with high dielectric access plastisol
- Dual rated for copper and aluminum conductors
- Wire range: 750Kcmil-14
- UL486 A/B Listed for Wire Connectors
- Cold temperature rated up to -45°C
- Pre-filled with oxide inhibitor prevents oxidation moisture and contaminants from entering area
- Supplied with removable access plugs
- Black insulation is UV resistant
- Insulation UV stabilized & listed to UL94 with V0 flammability

Applications

- Suitable for use in panel boards, cable entry, duct and troughs

Standard Material

- Connector- Aluminum
- Screw- Aluminum
- Insulation & Plugs- Plastisol

We Supply


- Suffix 'C' for Clear Product (eg. XXXXXC)

Standard Finish

- Black/Clear

Certification

- cULus Listed (E208265)
- NEC: 230.46

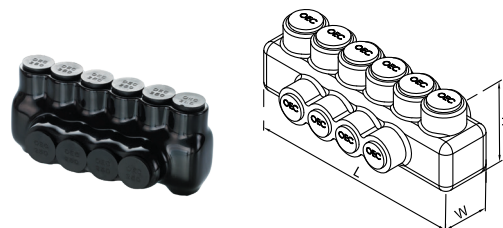

Catalog ID	Catalog ID	Wire Range	No of Port	Dimensions In Inches			Hex Size	Torque in (lbs)
				L	W	H		
60001M	60001MC	4-14 Sol/Str	02	2.26	1.11	1.38	1/8	35
64001	64001C	4-14 Sol/Str	03	2.81	1.11	1.38	1/8	35
64002	64002C	4-14 Sol/Str	04	3.37	1.11	1.38	1/8	35
64003	64003C	4-14 Sol/Str	05	3.93	1.11	1.38	1/8	35
64004	64004C	4-14 Sol/Str	06	4.49	1.11	1.38	1/8	35
64005	64005C	4-14 Sol/Str	07	5.05	1.11	1.38	1/8	35
64006	64006C	4-14 Sol/Str	08	5.61	1.11	1.38	1/8	35
64007	64007C	4-14 Sol/Str	09	6.17	1.11	1.38	1/8	35
64008	64008C	4-14 Sol/Str	10	6.73	1.11	1.38	1/8	35
64009	64009C	4-14 Sol/Str	11	7.29	1.11	1.38	1/8	35
64010	64010C	4-14 Sol/Str	12	7.85	1.11	1.38	1/8	35
64011	64011C	4-14 Sol/Str	13	8.41	1.11	1.38	1/8	35
64012	64012C	4-14 Sol/Str	14	8.97	1.11	1.38	1/8	35
60003AM	60003AMC	2-14 Sol/Str	02	2.50	1.20	1.38	Slot Head	100
64013A	64013AC	2-14 Sol/Str	03	3.14	1.20	1.38	Slot Head	100
64014A	64014AC	2-14 Sol/Str	04	3.77	1.20	1.38	Slot Head	100
64015A	64015AC	2-14 Sol/Str	05	4.40	1.20	1.38	Slot Head	100
64016A	64016AC	2-14 Sol/Str	06	5.03	1.20	1.38	Slot Head	100
64017A	64017AC	2-14 Sol/Str	07	5.66	1.20	1.38	Slot Head	100
64018A	64018AC	2-14 Sol/Str	08	6.29	1.20	1.38	Slot Head	100
64019A	64019AC	2-14 Sol/Str	09	6.92	1.20	1.38	Slot Head	100
64020A	64020AC	2-14 Sol/Str	10	7.55	1.20	1.38	Slot Head	100
64021A	64021AC	2-14 Sol/Str	11	8.18	1.20	1.38	Slot Head	100
64022A	64022AC	2-14 Sol/Str	12	8.81	1.20	1.38	Slot Head	100
60003M	60003MC	1/0-14 Sol/Str	02	3.38	1.39	1.72	3/16	100
64013	64013C	1/0-14 Sol/Str	03	4.23	1.39	1.72	3/16	100
64014	64014C	1/0-14 Sol/Str	04	5.07	1.39	1.72	3/16	100
64015	64015C	1/0-14 Sol/Str	05	5.92	1.39	1.72	3/16	100
64016	64016C	1/0-14 Sol/Str	06	6.76	1.39	1.72	3/16	100
64017	64017C	1/0-14 Sol/Str	07	7.61	1.39	1.72	3/16	100
64018	64018C	1/0-14 Sol/Str	08	8.45	1.39	1.72	3/16	100
64019	64019C	1/0-14 Sol/Str	09	9.30	1.39	1.72	3/16	100
64020	64020C	1/0-14 Sol/Str	10	10.14	1.39	1.72	3/16	100
64021	64021C	1/0-14 Sol/Str	11	10.99	1.39	1.72	3/16	100
64022	64022C	1/0-14 Sol/Str	12	11.83	1.39	1.72	3/16	100
64023	64023C	1/0-14 Sol/Str	13	12.68	1.39	1.72	3/16	100
64024	64024C	1/0-14 Sol/Str	14	13.52	1.39	1.72	3/16	100

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Insulated Multi-Tap Connectors Single Sided Entry with Mounting

Catalog ID	Catalog ID	Wire Range	No of Port	Dimensions In Inches			Hex Size	Torque in (lbs)
				L	W	H		
60005AM	60005AMC	2/0-14 Sol/Str	02	3.38	1.53	1.72	3/16	100
64025A	64025AC	2/0-14 Sol/Str	03	4.23	1.53	1.72	3/16	100
64026A	64026AC	2/0-14 Sol/Str	04	5.07	1.53	1.72	3/16	100
64027A	64027AC	2/0-14 Sol/Str	05	5.92	1.53	1.72	3/16	100
64028A	64028AC	2/0-14 Sol/Str	06	6.76	1.53	1.72	3/16	100
64029A	64029AC	2/0-14 Sol/Str	07	7.61	1.53	1.72	3/16	100
64030A	64030AC	2/0-14 Sol/Str	08	8.45	1.53	1.72	3/16	100
64031A	64031AC	2/0-14 Sol/Str	09	9.30	1.53	1.72	3/16	100
64032A	64032AC	2/0-14 Sol/Str	10	10.14	1.53	1.72	3/16	100
64033A	64033AC	2/0-14 Sol/Str	11	10.99	1.53	1.72	3/16	100
64034A	64034AC	2/0-14 Sol/Str	12	11.83	1.53	1.72	3/16	100
60005M	60005MC	3/0-14 Sol/Str	02	4.00	1.70	2.00	1/4	100
64025	64025C	3/0-14 Sol/Str	03	5.00	1.70	2.00	1/4	100
64026	64026C	3/0-14 Sol/Str	04	6.00	1.70	2.00	1/4	100
64027	64027C	3/0-14 Sol/Str	05	7.00	1.70	2.00	1/4	100
64028	64028C	3/0-14 Sol/Str	06	8.00	1.70	2.00	1/4	100
64029	64029C	3/0-14 Sol/Str	07	9.00	1.70	2.00	1/4	100
64030	64030C	3/0-14 Sol/Str	08	10.00	1.70	2.00	1/4	100
64031	64031C	3/0-14 Sol/Str	09	11.00	1.70	2.00	1/4	100
64032	64032C	3/0-14 Sol/Str	10	12.00	1.70	2.00	1/4	100
64033	64033C	3/0-14 Sol/Str	11	13.00	1.70	2.00	1/4	100
64034	64034C	3/0-14 Sol/Str	12	14.00	1.70	2.00	1/4	100
64035	64035C	3/0-14 Sol/Str	13	15.00	1.70	2.00	1/4	100
64036	64036C	3/0-14 Sol/Str	14	16.00	1.70	2.00	1/4	100
60006AM	60006AMC	250 Kcmil-10 Sol/Str	02	4.36	2.04	2.20	5/16	150
64037	64037C	250 Kcmil-10 Sol/Str	03	5.45	2.04	2.20	5/16	275
64038	64038C	250 Kcmil-10 Sol/Str	04	6.54	2.04	2.20	5/16	275
64039	64039C	250 Kcmil-10 Sol/Str	05	7.63	2.04	2.20	5/16	275
64040	64040C	250 Kcmil-10 Sol/Str	06	8.72	2.04	2.20	5/16	275
64041	64041C	250 Kcmil-10 Sol/Str	07	9.81	2.04	2.20	5/16	275
64042	64042C	250 Kcmil-10 Sol/Str	08	10.90	2.04	2.20	5/16	275
64043	64043C	250 Kcmil-10 Sol/Str	09	11.99	2.04	2.20	5/16	275
64044	64044C	250 Kcmil-10 Sol/Str	10	13.08	2.04	2.20	5/16	275
64045	64045C	250 Kcmil-10 Sol/Str	11	14.17	2.04	2.20	5/16	275
64046	64046C	250 Kcmil-10 Sol/Str	12	15.26	2.04	2.20	5/16	275
64047	64047C	250 Kcmil-10 Sol/Str	13	16.35	2.04	2.20	5/16	275
64048	64048C	250 Kcmil-10 Sol/Str	14	17.44	2.04	2.20	5/16	275
60007AM	60007AMC	350 Kcmil-10 Sol/Str	02	4.74	2.34	2.40	5/16	225
64049	64049C	350 Kcmil-10 Sol/Str	03	5.93	2.34	2.40	5/16	275
64050	64050C	350 Kcmil-10 Sol/Str	04	7.11	2.34	2.40	5/16	275
64051	64051C	350 Kcmil-10 Sol/Str	05	8.30	2.34	2.40	5/16	275
64052	64052C	350 Kcmil-10 Sol/Str	06	9.48	2.34	2.40	5/16	275
64053	64053C	350 Kcmil-10 Sol/Str	07	10.67	2.34	2.40	5/16	275
64054	64054C	350 Kcmil-10 Sol/Str	08	11.85	2.34	2.40	5/16	275
64055	64055C	350 Kcmil-10 Sol/Str	09	13.04	2.34	2.40	5/16	275
64056	64056C	350 Kcmil-10 Sol/Str	10	14.22	2.34	2.40	5/16	275
64057	64057C	350 Kcmil-10 Sol/Str	11	15.41	2.34	2.40	5/16	275
64058	64058C	350 Kcmil-10 Sol/Str	12	16.59	2.34	2.40	5/16	275
64059	64059C	350 Kcmil-10 Sol/Str	13	17.78	2.34	2.40	5/16	275
64060	64060C	350 Kcmil-10 Sol/Str	14	18.96	2.34	2.40	5/16	275

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)



Insulated Multi-Tap Connectors Single Sided Entry with Mounting

Catalog ID	Catalog ID	Wire Range	No of Port	Dimensions In Inches			Hex Size	Torque in (lbs)
				L	W	H		
60008M	60008MC	500 Kcmil-6 Str	02	5.60	2.55	2.90	5/16	310
64061	64061C	500 Kcmil-6 Str	03	7.00	2.55	2.90	5/16	310
64062	64062C	500 Kcmil-6 Str	04	8.40	2.55	2.90	5/16	310
64063	64063C	500 Kcmil-6 Str	05	9.80	2.55	2.90	5/16	310
64064	64064C	500 Kcmil-6 Str	06	11.20	2.55	2.90	5/16	310
64065	64065C	500 Kcmil-6 Str	07	12.60	2.55	2.90	5/16	310
64066	64066C	500 Kcmil-6 Str	08	14.00	2.55	2.90	5/16	310
64067	64067C	500 Kcmil-6 Str	09	15.40	2.55	2.90	5/16	310
64068	64068C	500 Kcmil-6 Str	10	16.80	2.55	2.90	5/16	310
64069	64069C	500 Kcmil-6 Str	11	18.20	2.55	2.90	5/16	310
64070	64070C	500 Kcmil-6 Str	12	19.60	2.55	2.90	5/16	310
64071	64071C	500 Kcmil-6 Str	13	21.00	2.55	2.90	5/16	310
64072	64072C	500 Kcmil-6 Str	14	22.40	2.55	2.90	5/16	310
60009AM	60009AMC	600 Kcmil-6 Str	02	5.60	2.55	2.90	5/16	442
64073A	64073AC	600 Kcmil-6 Str	03	7.00	2.55	2.90	5/16	442
64074A	64074AC	600 Kcmil-6 Str	04	8.40	2.55	2.90	5/16	442
64075A	64075AC	600 Kcmil-6 Str	05	9.80	2.55	2.90	5/16	442
64076A	64076AC	600 Kcmil-6 Str	06	11.20	2.55	2.90	5/16	442
64077A	64077AC	600 Kcmil-6 Str	07	12.60	2.55	2.90	5/16	442
64078A	64078AC	600 Kcmil-6 Str	08	14.00	2.55	2.90	5/16	442
64079A	64079AC	600 Kcmil-6 Str	09	15.40	2.55	2.90	5/16	442
64080A	64080AC	600 Kcmil-6 Str	10	16.80	2.55	2.90	5/16	442
64081A	64081AC	600 Kcmil-6 Str	11	18.20	2.55	2.90	5/16	442
64082A	64082AC	600 Kcmil-6 Str	12	19.60	2.55	2.90	5/16	442
60010AM	60010AMC	750 Kcmil-2 Str	02	10.00	3.08	3.20	3/8	442
64073	64073C	750 Kcmil-2 Str	03	12.50	3.08	3.20	3/8	442
64074	64074C	750 Kcmil-2 Str	04	15.00	3.08	3.20	3/8	442
64075	64075C	750 Kcmil-2 Str	05	17.50	3.08	3.20	3/8	442
64076	64076C	750 Kcmil-2 Str	06	20.00	3.08	3.20	3/8	442
64077	64077C	750 Kcmil-2 Str	07	22.50	3.08	3.20	3/8	442
64078	64078C	750 Kcmil-2 Str	08	25.00	3.08	3.20	3/8	442
64079	64079C	750 Kcmil-2 Str	09	27.50	3.08	3.20	3/8	442
64080	64080C	750 Kcmil-2 Str	10	30.00	3.08	3.20	3/8	442
64081	64081C	750 Kcmil-2 Str	11	32.50	3.08	3.20	3/8	442
64082	64082C	750 Kcmil-2 Str	12	35.00	3.08	3.20	3/8	442
64083	64083C	750 Kcmil-2 Str	13	37.50	3.08	3.20	3/8	442
64084	64084C	750 Kcmil-2 Str	14	40.00	3.08	3.20	3/8	442

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)