

Insulated Inline Splice

Features

- Insulated with high dielectric access plastisol
- Dual rated for copper and aluminum conductors
- Wire range: 600 Kcmil-14 Awg
- UL486 A/B Listed for Wire Connectors
- Cold temperature rated up to -45°C
- Pre-filled with oxide inhibitor prevents oxidation moisture and contaminants from entering area
- Supplied with removable access plugs
- Black insulation is UV resistant
- Insulation UV stabilized & listed to UL94 with V0 flammability

Applications

- Suitable for use in panel boards, cable entry, duct and troughs

Standard Material

- Connector- Aluminum
- Screw- Aluminum
- Insulation & Plugs- Plastisol

Standard Finish


- Black/Clear

We Supply

- Suffix 'C' for Clear Product (eg. XXXXXC)

Certification

- cULus Listed (E208265)
- NEC: 230.46

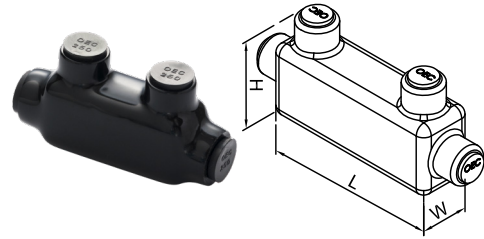

600 Kcmil-14 AWG

Catalog ID	Catalog ID	Wire Range	No of Port	Dimensions In Inches			Hex Size	Torque in (lbs)
				L	W	H		
61001A	61001AC	2-14 Sol/Str	02	3.46	0.82	1.62	Slot Head	100
61001	61001C	1/0-14 Sol/Str	02	3.41	0.99	1.94	3/16	100
61002A	61002AC	2/0-14 Sol/Str	02	3.50	0.99	1.95	3/16	150
61002	61002C	250 Kcmil-10 Sol/Str	02	4.26	1.26	2.28	5/16	150
61003	61003C	350 Kcmil-10 Sol/Str	02	5.21	1.33	2.63	5/16	221
61004	61004C	500 Kcmil-6 Str	02	5.99	1.84	3.19	5/16	310
61005A	61005AC	600 Kcmil-6 Str	02	6.18	1.77	3.17	5/16	442

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Insulated Inline Splice Double Stud

Features

- Insulated with high dielectric access plastisol
- Dual rated for copper and aluminum conductors
- Wire range: 750Kcmil-14
- Cold temperature rated up to -45°C
- Pre-filled with oxide inhibitor prevents oxidation moisture and contaminants from entering area
- Supplied with removable access plugs
- Black insulation is UV resistant
- Insulation UV stabilized & listed to UL94 with V0 flammability

Applications

- Suitable for use in panel boards, cable entry, duct and troughs

Standard Material

- Connector- Aluminum
- Screw- Aluminum
- Insulation & Plugs- Plastisol

Standard Finish


- Black/Clear

We Supply

- Suffix 'C' for Clear Product (eg. XXXXXC)

Certification

- cULus Listed (E208265)
- NEC: 230.46

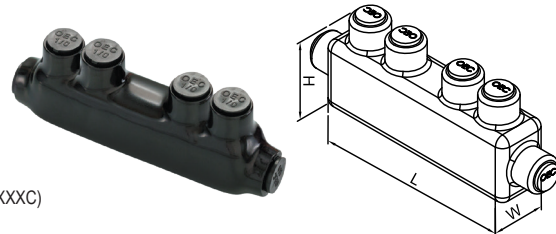

750 Kcmil-250 AWG

Catalog ID	Catalog ID	Wire Range	No of Port	Dimensions In Inches			Hex Size	Torque in (lbs)
				L	W	H		
61005	61005C	750 Kcmil-2 Str	02	6.50	2.75	2.64	3/8	442

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)