

Insulated Multi-Tap Connectors Alternate Entry

Features

- Insulated with high dielectric access plastisol
- Dual rated for copper and aluminum conductors
- Wire range: 600 Kcmil-14 AWG
- UL486 A/B Listed for Wire Connectors
- Cold temperature rated up to -45°C
- Pre-filled with oxide inhibitor prevents oxidation moisture and contaminants from entering area
- Supplied with removable access plugs
- Black insulation is UV resistant
- Insulation UV stabilized & listed to UL94 with V0 flammability

Applications

- Suitable for use in panel boards, cable entry, duct and troughs

Standard Material


- Connector- Aluminum
- Screw- Aluminum
- Insulation & Plugs- Plastisol

Standard Finish

- Black Color

Certification

- cULus Listed (E208265)
- NEC: 230.46

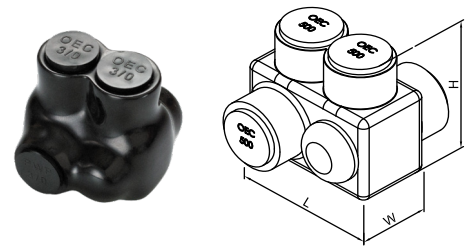

600 Kcmil-14 AWG

Catalog ID	Wire Range	No of Port	Dimensions In Inches			Hex Size	Torque in (lbs)
			L	W	H		
60002Z	4-14 Sol/Str	02	1.13	1.11	1.38	1/8	35
60003BZ	2-14 Sol/Str	02	1.25	1.20	1.38	Slot Head	100
60003DZ	1/0-14 Sol/Str	02	1.69	1.39	1.72	3/16	100
60004AZ	2/0-14 Sol/Str	02	1.69	1.53	1.72	3/16	100
60004Z	3/0-14 Sol/Str	02	2.00	1.70	2.00	1/4	100
60006Z	250 Kcmil-10 Sol/Str	02	2.18	2.04	2.20	5/16	150
60007Z	350 Kcmil-10 Sol/Str	02	2.37	2.34	2.40	5/16	225
60008Z	500 Kcmil-6 Str	02	2.80	2.55	2.90	5/16	310
60009AZ	600 Kcmil-6 Str	02	2.80	2.55	2.90	5/16	442

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Insulated Multi-Tap Connectors Alternate Entry with Mounting

Features

- Insulated with high dielectric access plastisol
- Dual rated for copper and aluminum conductors
- Wire range: 750 Kcmil-14 AWG
- Cold temperature rated up to -45°C
- Pre-filled with oxide inhibitor prevents oxidation moisture and contaminants from entering area
- Supplied with removable access plugs
- Black insulation is UV resistant
- Insulation UV stabilized & listed to UL94 with V0 flammability

Applications

- Suitable for use in panel boards, cable entry, duct and troughs

Standard Material


- Connector- Aluminum
- Screw- Aluminum
- Insulation & Plugs- Plastisol

Standard Finish

- Black Color

Certification

- cULus Listed (E208265)
- NEC: 230.46

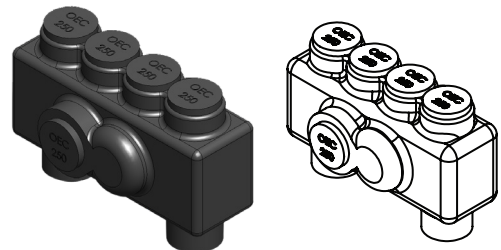

750 Kcmil-14 AWG

Catalog ID	Wire Range	No of Port	Dimensions In Inches			Hex Size	Torque in (lbs)
			L	W	H		
60002ZM	4-14 Sol/Str	02	2.26	1.31	1.38	1/8	35
60003BZM	2-14 Sol/Str	02	2.50	1.41	1.38	Slotted Screw	100
60003DZM	1/0-14 Sol/Str	02	3.38	1.64	1.72	3/16	100
60004AZM	2/0-14 Sol/Str	02	3.38	1.80	1.72	3/16	100
60004ZM	3/0-14 Sol/Str	02	4.00	2.00	2.00	1/4	100
60006ZM	250 Kcmil-10 Sol/Str	02	4.36	2.40	2.20	5/16	150
60007ZM	350 Kcmil-10 Sol/Str	02	4.74	2.75	2.40	5/16	225
60008ZM	500 Kcmil-6 Str	02	5.60	3.00	2.90	5/16	310
60009AZM	600 Kcmil-6 Str	02	5.60	3.00	2.90	5/16	442
60010ZM	750 Kcmil-2 Str	02	10.00	3.62	3.20	3/8	442

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)