

Underground Submersible Splice Connector

Features

- Dual rated for aluminum & copper conductors & supplied with pre-filled oxide inhibitor
- Abrasion, chemical UV resistance
- Range taking design
- UL486 D Listed for Sealed Wire Connectors
- Insulation high strength EPDM rubber with V0 flammability
- Encapsulated in rubber with a nominal thickness and high dielectric strength

Applications

- Use as end to end splice or reducer
- Used in lighting & underground power distribution

Standard Material


- Aluminum

Standard Finish

- EPDM insulation

Certification

- cULus Listed (E313905)
- NEC: 230.46

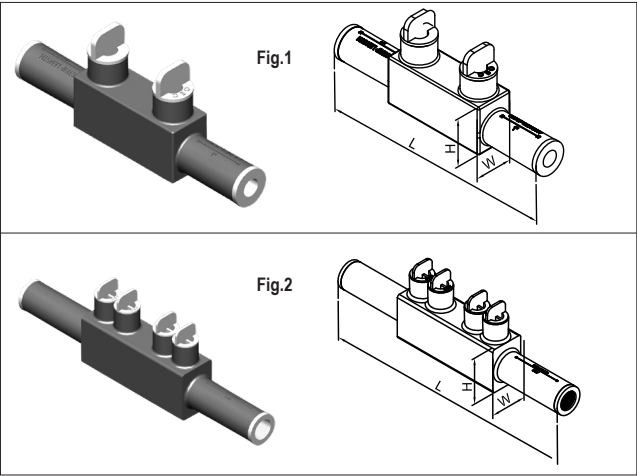

Catalog ID	Fig. No	Wire Range	Dimensions In Inches			Hex Size
			L	W	H	
73001	1	2/0-14 Sol/Str	5.46	0.87	2.10	3/16
73002		350 Kcmil-12 Sol/Str	8.74	1.14	3.21	5/16
73003		600 Kcmil-12 Sol/Str	10.42	1.50	3.52	5/16
73004	2	750 Kcmil-12 Sol/Str	5.46	0.87	2.10	3/8

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)