

Underground Submersible Dual Side Connector

Features

- Dual rated for aluminum & copper conductors & supplied with pre-filled oxide inhibitor
- Abrasion, chemical UV resistance
- Range taking design
- UL486 D Listed for Sealed Wire Connectors
- Insulation high strength EPDM rubber with V0 flammability
- Encapsulated in rubber with a nominal thickness and high dielectric strength

Applications

- Use as end to end splice or reducer
- Used in lighting & underground power distribution

Standard Material


- Aluminum

Standard Finish

- EPDM insulation

Certification

- cULus Listed (E313905)
- NEC: 230.46

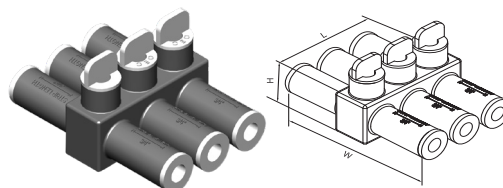

Catalog ID	Wire Range	No of Port	Dimensions In Inches			Hex Size
			L	W	H	
71001	2/0-14 Sol/Str	02	1.81	3.85	2.10	3/16
71002	2/0-14 Sol/Str	03	2.66	3.85	2.10	3/16
71003	2/0-14 Sol/Str	04	3.50	3.85	2.10	3/16
71004	2/0-14 Sol/Str	05	4.35	3.85	2.10	3/16
71005	2/0-14 Sol/Str	06	5.20	3.85	2.10	3/16
71006	2/0-14 Sol/Str	07	6.04	3.85	2.10	3/16
71007	2/0-14 Sol/Str	08	6.89	3.85	2.10	3/16
71008	2/0-14 Sol/Str	09	7.73	3.85	2.10	3/16
71009	2/0-14 Sol/Str	10	8.58	3.85	2.10	3/16
71010	2/0-14 Sol/Str	11	9.43	3.85	2.10	3/16
71011	2/0-14 Sol/Str	12	10.27	3.85	2.10	3/16
71012	350 Kcmil-12 Sol/Str	02	2.40	6.41	3.21	5/16
71013	350 Kcmil-12 Sol/Str	03	3.60	6.41	3.21	5/16
71014	350 Kcmil-12 Sol/Str	04	4.76	6.41	3.21	5/16
71015	350 Kcmil-12 Sol/Str	05	5.92	6.41	3.21	5/16
71016	350 Kcmil-12 Sol/Str	06	7.08	6.41	3.21	5/16
71017	350 Kcmil-12 Sol/Str	07	8.24	6.41	3.21	5/16
71018	350 Kcmil-12 Sol/Str	08	9.40	6.41	3.21	5/16
71019	350 Kcmil-12 Sol/Str	09	10.56	6.41	3.21	5/16
71020	350 Kcmil-12 Sol/Str	10	11.72	6.41	3.21	5/16
71021	350 Kcmil-12 Sol/Str	11	12.88	6.41	3.21	5/16
71022	350 Kcmil-12 Sol/Str	12	14.05	6.41	3.21	5/16
71023	600 Kcmil-12 Sol/Str	02	3.22	7.79	3.52	5/16
71024	600 Kcmil-12 Sol/Str	03	4.92	7.79	3.52	5/16
71025	600 Kcmil-12 Sol/Str	04	6.63	7.79	3.52	5/16
71026	600 Kcmil-12 Sol/Str	05	8.34	7.79	3.52	5/16
71027	600 Kcmil-12 Sol/Str	06	10.05	7.79	3.52	5/16
71028	600 Kcmil-12 Sol/Str	07	11.76	7.79	3.52	5/16

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Underground Submersible Dual Side Connector

Catalog ID	Wire Range	No of Port	Dimensions In Inches			Hex Size
			L	W	H	
71029	600 Kcmil-12 Sol/Str	08	13.47	7.79	3.52	5/16
71030	600 Kcmil-12 Sol/Str	09	15.18	7.79	3.52	5/16
71031	600 Kcmil-12 Sol/Str	10	16.88	7.79	3.52	5/16
71032	600 Kcmil-12 Sol/Str	11	18.59	7.79	3.52	5/16
71033	600 Kcmil-12 Sol/Str	12	20.30	7.79	3.52	5/16
71034	750 Kcmil-12 Sol/Str	02	3.46	9.11	3.90	3/8
71035	750 Kcmil-12 Sol/Str	03	5.30	9.11	3.90	3/8
71036	750 Kcmil-12 Sol/Str	04	7.13	9.11	3.90	3/8
71037	750 Kcmil-12 Sol/Str	05	8.96	9.11	3.90	3/8
71038	750 Kcmil-12 Sol/Str	06	10.79	9.11	3.90	3/8
71039	750 Kcmil-12 Sol/Str	07	12.62	9.11	3.90	3/8
71040	750 Kcmil-12 Sol/Str	08	14.45	9.11	3.90	3/8
71041	750 Kcmil-12 Sol/Str	09	16.28	9.11	3.90	3/8
71042	750 Kcmil-12 Sol/Str	10	18.11	9.11	3.90	3/8
71043	750 Kcmil-12 Sol/Str	11	19.94	9.11	3.90	3/8
71044	750 Kcmil-12 Sol/Str	12	21.77	9.11	3.90	3/8

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)