

Underground Submersible Multi Side Dual Side Connector

Features

- Dual rated for aluminum & copper conductors & supplied with pre-filled oxide inhibitor
- Abrasion, chemical UV resistance
- Range taking design
- UL486 D Listed for Sealed Wire Connectors
- Insulation high strength EPDM rubber with V0 flammability
- Encapsulated in rubber with a nominal thickness and high dielectric strength

Applications

- Use as end to end splice or reducer
- Used in lighting & underground power distribution

Standard Material


- Aluminum

Standard Finish

- EPDM insulation

Certification

- cULus Listed (E313905)
- NEC: 230.46

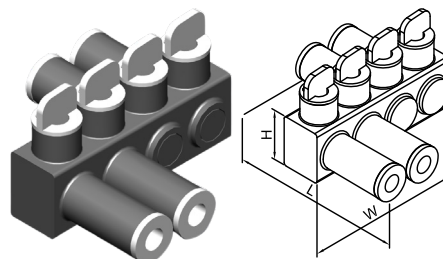

Catalog ID	Wire Range	No of Port	Dimensions In Inches			Hex Size
			L	W	H	
72003D	2/0-14 Sol/Str	04	3.50	3.85	2.10	3/16
72005D	2/0-14 Sol/Str	06	5.20	3.85	2.10	3/16
72007D	2/0-14 Sol/Str	08	6.89	3.85	2.10	3/16
72009D	2/0-14 Sol/Str	10	8.58	3.85	2.10	3/16
720011D	2/0-14 Sol/Str	12	10.27	3.85	2.10	3/16
720014D	350 Kcmil-12 Sol/Str	04	4.76	6.41	3.21	5/16
720016D	350 Kcmil-12 Sol/Str	06	7.08	6.41	3.21	5/16
720018D	350 Kcmil-12 Sol/Str	08	9.40	6.41	3.21	5/16
72020D	350 Kcmil-12 Sol/Str	10	11.72	6.41	3.21	5/16
72022D	350 Kcmil-12 Sol/Str	12	14.05	6.41	3.21	5/16
72025D	600 Kcmil-12 Sol/Str	04	6.63	7.79	3.52	5/16
72027D	600 Kcmil-12 Sol/Str	06	10.05	7.79	3.52	5/16
72029D	600 Kcmil-12 Sol/Str	08	13.47	7.79	3.52	5/16
72031D	600 Kcmil-12 Sol/Str	10	16.88	7.79	3.52	5/16
72033D	600 Kcmil-12 Sol/Str	12	20.30	7.79	3.52	5/16
72036D	750 Kcmil-12 Sol/Str	04	7.13	9.11	3.90	3/8
72038D	750 Kcmil-12 Sol/Str	06	10.79	9.11	3.90	3/8
72040D	750 Kcmil-12 Sol/Str	08	17.45	9.11	3.90	3/8
72042D	750 Kcmil-12 Sol/Str	10	18.11	9.11	3.90	3/8
72044D	750 Kcmil-12 Sol/Str	12	21.77	9.11	3.90	3/8

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)