

Dry-Shield® 2 Gang Box 4 Hole Threaded Outlets

Features

- Durable die-cast aluminum construction provides a long product life.
- 1/2" and 3/4" NPT threaded Outlets.
- Precision cast and machined surfaces allow safer wire-pulling.
- Mounting lugs for a variety of mounting methods.
- Available in gray, black, bronze and white.

Applications

- For use as a weatherproof junction box in damp or wet locations when combined with a weatherproof cover.
- Features an accessible wiring chamber that provides a convenient location to maintain or change a system, make splices, and pull conductors.
- Junction box to branch conduits.

Standard Material

- Die Cast Aluminum

Standard Finish


- Powder Coated

Packaging

- Shrink Packed
- Blister Carded

Certification

- cULus Listed (E520149)
- Boxes and covers suitable for use in wet locations
- NEMA 3R Rated
- Complies with NEC Article 409.6(B)(1)

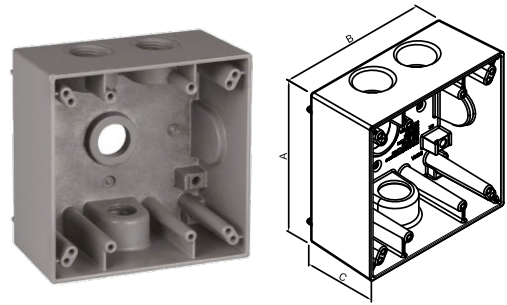

Catalog ID	Size	Outlet	A	B	C	Volume In³	Color
W2B504	1/2	4-1/2	4.50	4.50	2.10	30	Gray
W2B504BL	1/2	4-1/2	4.50	4.50	2.10	30	Black
W2B504AB	1/2	4-1/2	4.50	4.50	2.10	30	Bronze
W2B504WH	1/2	4-1/2	4.50	4.50	2.10	30	White
W2B754	3/4	4-3/4	4.50	4.50	2.10	30	Gray
W2B754BL	3/4	4-3/4	4.50	4.50	2.10	30	Black
W2B754AB	3/4	4-3/4	4.50	4.50	2.10	30	Bronze
W2B754WH	3/4	4-3/4	4.50	4.50	2.10	30	White

Dry-Shield® 2 Gang Box 4 Hole Threaded Outlets (Universal)

Features

- Durable die-cast aluminum construction provides a long product life.
- 1/2" and 3/4" NPT threaded Outlets.
- Precision cast and machined surfaces allow safer wire-pulling.
- Mounting lugs for a variety of mounting methods.
- Available in gray, black, bronze and white.

Applications

- For use as a weatherproof junction box in damp or wet locations when combined with a weatherproof cover.
- Features an accessible wiring chamber that provides a convenient location to maintain or change a system, make splices, and pull conductors.
- Junction box to branch conduits.

Standard Material

- Die Cast Aluminum

Standard Finish


- Powder Coated

Packaging

- Shrink Packed
- Blister Carded

Certification

- cULus Listed (E520149)
- Boxes and covers suitable for use in wet locations
- NEMA 3R Rated
- Complies with NEC Article 409.6(B)(1)

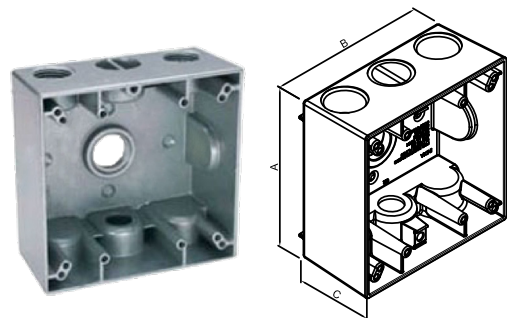

Catalog ID	Size	Outlet	A	B	C	Volume In³	Color
W2B504U	1/2	4-1/2	4.50	4.50	2.10	30	Gray
W2B504UBL	1/2	4-1/2	4.50	4.50	2.10	30	Black
W2B504UAB	1/2	4-1/2	4.50	4.50	2.10	30	Bronze
W2B504UWH	1/2	4-1/2	4.50	4.50	2.10	30	White
W2B754U	3/4	4-3/4	4.50	4.50	2.10	30	Gray
W2B754UBL	3/4	4-3/4	4.50	4.50	2.10	30	Black
W2B754UAB	3/4	4-3/4	4.50	4.50	2.10	30	Bronze
W2B754UWH	3/4	4-3/4	4.50	4.50	2.10	30	White