

## Dry-Shield® 2 Gang Box 5 Hole Threaded Outlets - XV (Universal)

### Features

- Durable die-cast aluminum construction provides a long product life.
- 1/2" and 3/4" NPT threaded Outlets.
- Precision cast and machined surfaces allow safer wire-pulling.
- Mounting lugs for a variety of mounting methods.
- Available in gray, black, bronze and white.

### Applications

- For use as a weatherproof junction box in damp or wet locations when combined with a weatherproof cover.
- Features an accessible wiring chamber that provides a convenient location to maintain or change a system, make splices, and pull conductors.
- Junction box to branch conduits.

### Standard Material

- Die Cast Aluminum

### Standard Finish


- Powder Coated

### Packaging

- Shrink Packed
- Blister Carded

### Certification

- cULus Listed (E520149)
- Boxes and covers suitable for use in wet locations
- NEMA 3R Rated
- Complies with NEC Article 409.6(B)(1)

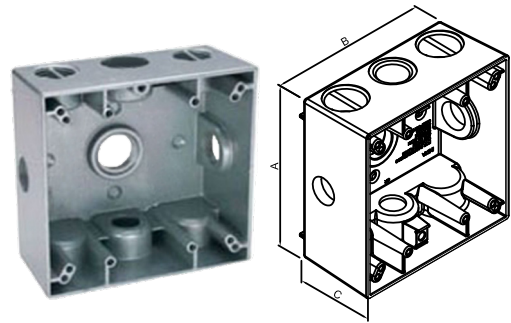

Catalog ID	Size	Outlet	A	B	C	Volume In³	Color
W2B505X	1/2	5-1/2	4.50	4.50	2.10	39	Gray
W2B505XBL	1/2	5-1/2	4.50	4.50	2.10	39	Black
W2B505XAB	1/2	5-1/2	4.50	4.50	2.10	39	Bronze
W2B505XWH	1/2	5-1/2	4.50	4.50	2.10	39	White
W2B755X	3/4	5-3/4	4.50	4.50	2.10	29	Gray
W2B755XBL	3/4	5-3/4	4.50	4.50	2.10	29	Black
W2B755XAB	3/4	5-3/4	4.50	4.50	2.10	29	Bronze
W2B755XWH	3/4	5-3/4	4.50	4.50	2.10	29	White

## Dry-Shield® 2 Gang Deep Box 5 Hole Threaded Outlets

### Features

- Durable die-cast aluminum construction provides a long product life.
- 1/2", 3/4" and 1" NPT threaded Outlets.
- Precision cast and machined surfaces allow safer wire-pulling.
- Mounting lugs for a variety of mounting methods.
- Available in gray, black, bronze and white.

### Applications

- For use as a weatherproof junction box in damp or wet locations when combined with a weatherproof cover.
- Features an accessible wiring chamber that provides a convenient location to maintain or change a system, make splices, and pull conductors.
- Junction box to branch conduits.

### Standard Material

- Die Cast Aluminum

### Standard Finish


- Powder Coated

### Packaging

- Shrink Packed
- Blister Carded

### Certification

- cULus Listed (E520149)
- Boxes and covers suitable for use in wet locations
- NEMA 3R Rated
- Complies with NEC Article 409.6(B)(1)

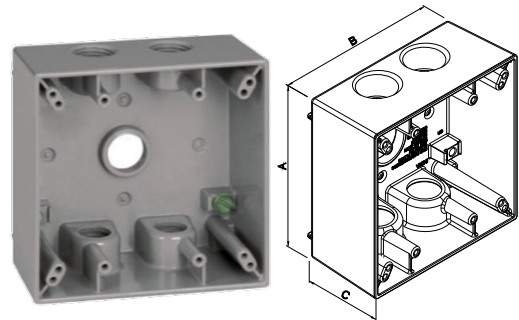

Catalog ID	Size	Outlet	A	B	C	Volume In³	Color
W2DB505	1/2	5-1/2	4.50	4.50	2.70	29	Gray
W2DB505BL	1/2	5-1/2	4.50	4.50	2.70	29	Black
W2DB505AB	1/2	5-1/2	4.50	4.50	2.70	29	Bronze
W2DB505WH	1/2	5-1/2	4.50	4.50	2.70	29	White
W2DB755	3/4	5-3/4	4.50	4.50	2.70	35	Gray
W2DB755BL	3/4	5-3/4	4.50	4.50	2.70	35	Black
W2DB755AB	3/4	5-3/4	4.50	4.50	2.70	35	Bronze
W2DB755WH	3/4	5-3/4	4.50	4.50	2.70	35	White
W2DB1005	1	5-1	4.50	4.50	2.70	35	Gray
W2DB1005BL	1	5-1	4.50	4.50	2.70	35	Black
W2DB1005AB	1	5-1	4.50	4.50	2.70	35	Bronze
W2DB1005WH	1	5-1	4.50	4.50	2.70	35	White