

Rigid Locknut (Steel)

Catalog ID	Trade Size	Dimensions In Inches		
		A	B	C
FS181	1/2	1.13	0.125	1.00
FS182	3/4	1.39	0.125	1.25
FS183	1	1.70	0.170	1.56
FS184	1-1/4	2.06	0.170	1.90
FS185	1-1/2	2.36	0.170	2.17
FS186	2	2.86	0.23	2.68
FS187	2-1/2	3.43	0.23	3.25
FS188	3	4.11	0.23	3.95
FS189	3-1/2	4.69	0.23	4.49
FS190	4	5.26	0.23	5.00

Features

- Serrated teeth prevent loosening from vibrations
- Tightens without deformation

Applications

- For use in dry locations on threaded Rigid/IMC conduit to secure conduit to a box or enclosure
- Use to fasten threaded conduit to an opening in a box or enclosure

Standard Material


- Steel

Standard Finish

- Zinc-electroplated

Certification

- 1/2"-2" cULus Listed (E539274)
- 2-1/2"-4" cULus Listed (E539275)
- NEMA FB1



Rigid Coupling (Steel)

Catalog ID	Trade Size	Dimensions In Inches	
		A	B
F41	1/2	1.66	1.00
F42	3/4	1.69	1.25
F43	1	1.99	1.52
F44	1-1/4	2.15	1.90
F45	1-1/2	2.36	2.13
F46	2	2.64	2.61
F47	2-1/2	3.7	3.45
F48	3	4.36	4.00
F49	3-1/2	4.88	4.57
F50	4	5.15	5.00
F50-1	5	3.95	6.00
F50-2	6	4.25	7.00

Features

- NPSM thread type
- Indoor or outdoor use
- Fully sealed insertion thread

Applications

- For use in dry locations to couple two ends of rigid or IMC conduit
- OEC 1/2" to 4" threaded couplings provide secure concrete-tight connections when taped
- Suitable for applications above 600V

Standard Material


- Steel

Standard Finish

- Zinc-electroplated

Certification

- cULus Listed

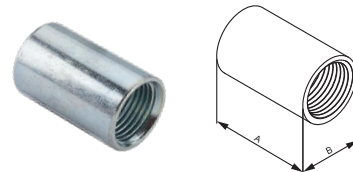

Rigid Conduit Bushing (Zinc Die Cast)

Catalog ID	Trade Size	Dimensions In Inches		
		A	B	C
F201	1/2	1.043	0.457	0.567
F202	3/4	1.276	0.465	0.740
F203	1	1.516	0.551	0.965
F204	1-1/4	1.882	0.551	1.260
F205	1-1/2	2.146	0.551	1.520
F206	2	2.669	0.551	1.949
F207	2-1/2	3.238	0.827	2.319
F208	3	3.858	0.827	2.929
F209	3-1/2	4.346	0.827	3.386
F210	4	4.862	0.827	3.862

Features

- Rounded surface of the bushing prevents damage to wire insulation

Standard Finish

- Zinc-electroplated

Applications


- Use with locknut to terminate threaded Rigid or IMC conduit to an outlet box

Certification

- CULus Listed (E319819)

Standard Material

- Zinc die-cast

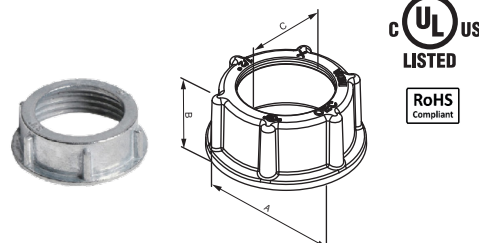

Rigid Conduit Bushing Insulated (Zinc Die Cast)

Catalog ID	Trade Size	Dimensions In Inches		
		A	B	C
F211	1/2	1.043	0.457	0.567
F212	3/4	1.276	0.465	0.740
F213	1	1.516	0.551	0.965
F214	1-1/4	1.882	0.551	1.260
F215	1-1/2	2.146	0.551	1.520
F216	2	2.669	0.551	1.949
F217	2-1/2	3.238	0.827	2.319
F218	3	3.858	0.827	2.929
F219	3-1/2	4.346	0.827	3.386
F220	4	4.862	0.827	3.862

Features

- Bushing prevents damage to wire insulation
- Available with insulated bushing
- 105°C Thermoplastic Liner

Applications


- Use for joint and proper alignment of conduits

Certification

- CULus Listed (E319819)

Standard Material

- Zinc die-cast

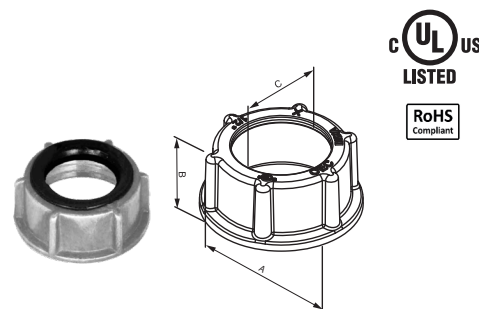

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Grounding Bushing Insulated (Zinc Die Cast) with Aluminum Feed-Through Lug

Features

- Liner is rated flame retardant to 105°C
- UL listed for use with copper or aluminum grounding conductor
- Assembled with set screws jumper lug

Applications


- Use for joint and proper alignment of conduits
- Use with locknut to terminate service conduit to a cabinet
- Indoor or outdoor use

Material

- Body - Zinc die-cast/plastic insulator
- Lug - Aluminum
- Clamping screw - Steel
- Set screws - Steel

Certification

- CULus Listed (E178441)



Catalog ID	Trade Size	Ground Min	Wire Max	Dimensions In Inches		
				A	B	C
FZ221	1/2	14	4	1.850	0.457	0.567
FZ222	3/4	14	4	2.087	0.465	0.740
FZ223	1	14	4	2.323	0.551	0.965
FZ224	1-1/4	14	4	2.677	0.551	1.260
FZ224A	1-1/4	14	1/0	3.091	0.551	1.260
FZ225	1-1/2	14	4	2.953	0.551	1.520
FZ225A	1-1/2	14	1/0	3.346	0.551	1.520
FZ226	2	14	4	3.484	0.551	1.949
FZ226A	2	14	1/0	3.878	0.551	1.949
FZ227	2-1/2	14	1/0	4.409	0.827	2.358
FZ227A	2-1/2	6	250MCM	4.752	0.827	2.358
FZ227B	2-1/2	-	250MCM	4.949	0.827	2.358
FZ228	3	14	1/0	5.059	0.827	2.929
FZ228A	3	6	250MCM	5.433	0.827	2.929
FZ228B	3	-	250MCM	5.591	0.827	2.929
FZ229	3-1/2	14	1/0	5.866	0.827	3.386
FZ229A	3-1/2	6	250MCM	6.063	0.827	3.386
FZ230	4	14	1/0	6.358	0.827	3.862
FZ230A	4	6	250MCM	6.555	0.827	3.862

Grounding Bushing Insulated (Zinc Die Cast) with Aluminum Lay-In Lug

Features

- Liner is rated flame retardant to 105°C
- UL listed for use with copper or aluminum grounding conductor
- Assembled with set screws jumper lug

Applications


- Use for joint and proper alignment of conduits
- Use with locknut to terminate service conduit to a cabinet
- Indoor or outdoor use
- Use to provide a means of grounding Rigid or IMC conduit

Material

- Body - Zinc die-cast/plastic insulator
- Lug - Aluminum
- Clamping screw - Steel
- Set screws - Steel

Certification

- CULus Listed (E178441)



Catalog ID	Trade Size	Wire Size		Dimensions In Inches		
		Min	MAX	A	B	C
FZ231	1/2	14	4	1.850	0.457	0.567
FZ232	3/4	14	4	2.087	0.465	0.740
FZ233	1	14	4	2.323	0.551	0.965
FZ234	1-1/4	14	4	2.677	0.551	1.260
FZ234A	1-1/4	14	1/0	3.091	0.551	1.260
FZ235	1-1/2	14	4	2.953	0.551	1.520
FZ235A	1-1/2	14	1/0	3.346	0.551	1.520
FZ236	2	14	4	3.484	0.551	1.949
FZ236A	2	14	1/0	3.878	0.551	1.949
FZ237	2-1/2	14	1/0	4.409	0.827	2.358
FZ237A	2-1/2	6	250MCM	4.752	0.827	2.358
FZ237B	2-1/2	-	250MCM	4.949	0.827	2.358
FZ238	3	14	1/0	5.059	0.827	2.929
FZ238A	3	6	250MCM	5.433	0.827	2.929
FZ238B	3	-	250MCM	5.591	0.827	2.929
FZ239	3-1/2	14	1/0	5.866	0.827	3.386
FZ239A	3-1/2	6	250MCM	6.063	0.827	3.386
FZ240	4	14	1/0	6.358	0.827	3.862
FZ240A	4	6	250MCM	6.555	0.827	3.862

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)