

Cord Grip Connector

Features

- Aluminum cord connector provides durable performance
- Lightweight design

Applications

- UL listed for wet location

Technical Specification:


- Thread: NPT
- Temperature: - 30° F to 225° F (-34°C to 107°C)

Material

- Body & Cap: Aluminum
- Seal: Neoprene
- Gasket: Neoprene

Certification

- UL 514B (E319819)

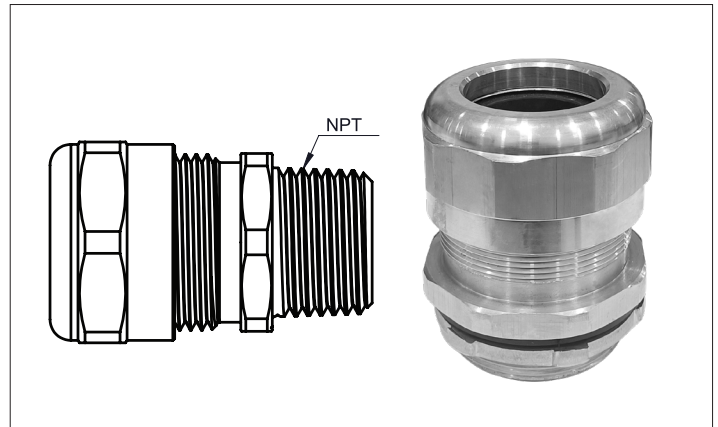

Dimensions In Inches					
Cord Grip (Individual)	Cord Grip (Kit)	Cable Range (Inch)	Thread Size (NPT)	Rubber Seal Part Number	A/F
CG025188	OEC-CG025-K1	0.125 - 0.188	3/8"	OEC003	0.875
CG025250		0.188 - 0.250		OEC004	
CG025312		0.250 - 0.312		OEC005	
CG025375	OEC-CG025-K2	0.312 - 0.375		OEC006	
CG025438		0.375 - 0.438		OEC007	
CG050188	OEC-CG050-K1	0.125 - 0.188	1/2"	OEC103	1.13
CG050250		0.188 - 0.250		OEC104	
CG050312		0.250 - 0.312		OEC105	
CG050375		0.312 - 0.375		OEC106	
CG050438	OEC-CG050-K2	0.375 - 0.438		OEC107	
CG050500		0.438 - 0.500		OEC108	
CG050562		0.500 - 0.562		OEC109	
CG050625		0.562 - 0.625		OEC110	
CG075500	OEC-CG075-K1	0.438 - 0.500	3/4"	OEC208	1.37
CG075562		0.500 - 0.562		OEC209	
CG075625		0.562 - 0.625		OEC210	
CG075688	OEC-CG075-K2	0.562 - 0.688		OEC211	
CG075750		0.625 - 0.750		OEC212	
CG075812		0.688 - 0.812		OEC213	
CG100562	OEC-CG100-K1	0.438 - 0.562	1"	OEC309	1.55
CG100625		0.562 - 0.625		OEC310	
CG100688		0.562 - 0.688		OEC311	
CG100750		0.625 - 0.750		OEC312	
CG100812	OEC-CG100-K2	0.688 - 0.812		OEC313	
CG100875		0.750 - 0.875		OEC314	
CG100938		0.812 - 0.938		OEC315	
CG1001000		0.875 - 1.000		OEC316	

Cord Grip Connector

Dimensions In Inches					
Cord Grip (Individual)	Cord Grip (Kit)	Cable Range (Inch)	Thread Size (NPT)	Rubber Seal Part Number	A/F
CG125688	OEC-CG125K1	0.562 – 0.688	1-1/4"	OEC411	2.25
CG125812		0.688 – 0.812		OEC413	
CG125875		0.750 – 0.875		OEC414	
CG1251000		0.875 – 1.000		OEC416	
CG1251125	OEC-CG125K2	1.000 – 1.125		OEC418	
CG1251250		1.125 – 1.250		OEC420	
CG1251375		1.250 – 1.375		OEC422	
CG150688	OEC-CG150K1	0.562 – 0.688	1-1/2"	OEC411	2.25
CG150812		0.688 – 0.812		OEC413	
CG150875		0.750 – 0.875		OEC414	
CG1501000		0.875 – 1.000		OEC416	
CG1501125	OEC-CG150K2	1.000 – 1.125		OEC418	
CG1501250		1.125 – 1.250		OEC420	
CG1501375		1.250 – 1.375		OEC422	
CG2001375	OEC-CG200K1	1.250 – 1.375	2"	OEC622	2.83
CG2001437		1.312 – 1.437		OEC623	
CG2001562		1.438 – 1.562		OEC625	
CG2001688	OEC-CG200K2	1.562 – 1.688		OEC627	
CG2001812		1.688 – 1.812		OEC629	
CG2501812	OEC-CG250K1	1.688 – 1.812	2-1/2"	OEC729	4.13
CG2501938		1.812 – 1.938		OEC731	
CG2502062		1.938 – 2.062		OEC729	
CG2502188	OEC-CG250K2	2.062 – 2.188		OEC735	
CG2502312		2.188 – 2.312		OEC737	
CG2502438		2.312 – 2.438		OEC739	
CG3002625	OEC-CG300K1	2.437 – 2.625	3"	OEC901	4.72
CG3002812		2.625 – 2.812		OEC902	
CG3003000	OEC-CG300K2	2.812 – 3.000		OEC903	
CG3003250		3.000 – 3.250		OEC904	

Note : * not UL Listed