

Copper, Two Hole, Long Barrel Compression Lug, Break-Away

Features

- Manufactured from high strength seamless copper tubing
- Chamfered entry
- Color coded die index and crimp marks
- Electro-Tin plated for corrosion resistance
- UL486A/B Listed for Wire Connectors
- UL467 Listed for grounding and bonding applications
- UL Listed and CSA Certified with competitor's compression tools
- Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

Standard Material

- Copper

Standard Finish



- Electro-tin plated

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

We Supply

- Prefix 'F' for flared entry (eg. FXXXXX)
- Prefix 'P' for inspection window (eg. PXXXXX)

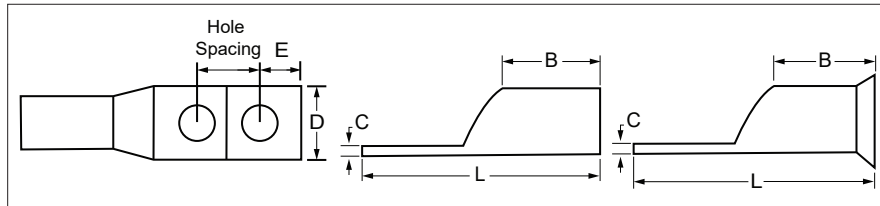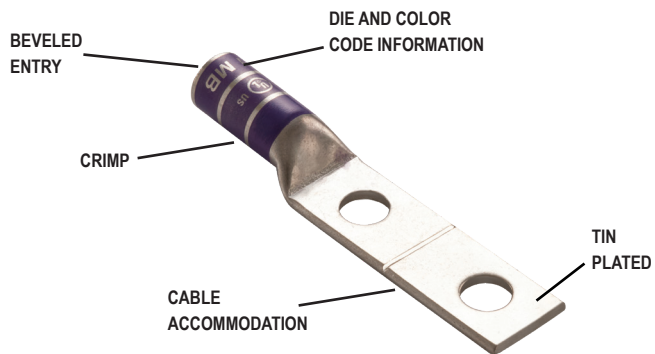

For Use With Copper Conductor Only

Catalog ID	Wire Size	Alt Wire Size	Range Taking	Stud Size	Stud Hole Dia.	Hole Spacing	Dimensions in Inches					Color Code	• Installation Tooling			Dieless	
							L	B	C	D	E		Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	Ilco ILC-12-N, ILC-12-H-N, ILCB-12			
BA98083	8	#8 FLEX, 8 DLO	8-10	#10	0.20	5/8	2.19	0.81	0.08	0.42	0.28	RED	U8CTR	ILD - 2	ILD - 21	Burndy Dieless - PAT444S & PAT4PC-834LI.	
BA98084				1/4	0.27	5/8	2.19	0.81	0.08	0.42	0.28						
BA98084B				1/4	0.27	1	2.74	0.81	0.06	0.55	0.38						
BA98084C				1/4	0.27	3/4	2.74	0.81	0.08	0.42	0.38						
BA98084D				3/8	0.41	1-3/4	2.30	0.81	0.06	0.42	0.32						
BA98084A				3/8	0.41	1	3.92	0.81	0.06	0.55	0.62						
BA98084E				5/16	0.33	1-3/4	3.92	0.81	0.08	0.55	0.62						
BA98085	6	#6 FLEX, 6 DLO	6-8	1/4	0.27	5/8	2.36	0.98	0.08	0.42	0.28	BLUE	U5CRT U8CABT	ILD - 3	ILD - 24	Ilco Dieless - IDT-6, IDT-6H, IDTB-6, IDTB-6-LI-O, TB-6DF1000-P, IDT-12-N, IVTB-6	
BA98085A				1/4	0.27	1/2	2.24	0.98	0.08	0.42	0.28						
BA98085B				1/2	0.53	1-3/4	4.09	0.98	0.08	0.83	0.62						
BA98085C				1/4	0.27	3/4	2.48	0.98	0.08	0.42	0.28						
BA98085D				3/8	0.41	1	2.91	0.98	0.06	0.55	0.38						
BA98085E				3/8	0.41	3/4	2.72	0.98	0.06	0.55	0.32						
BA98086				1/4	0.27	5/8	2.36	0.98	0.09	0.49	0.28						
BA98086A	4	-	4-6	3/8	0.41	1	2.91	0.98	0.07	0.55	0.38	GRAY	U4CRT U6CABT	ILD - 4	ILD - 29		
BA98086B				1/4	0.27	3/4	2.48	0.98	0.09	0.49	0.28						
BA98086C				5/16	0.33	1	2.91	0.98	0.07	0.55	0.38						
BA98086D				1/4	0.27	1	2.91	0.98	0.09	0.49	0.38						
BA98086E				3/8	0.41	3/4	2.91	0.98	0.07	0.55	0.28						
BA98087				1/2	0.53	1-3/4	4.09	0.98	0.12	0.87	0.62						
BA98087A				5/16	0.33	3/4	2.87	1.10	0.09	0.55	0.32						
BA98087B	3	#4 FLEX, 4 DLO	3-6	3/8	0.41	1	3.07	1.10	0.08	0.59	0.38	WHITE	U2CRT	-	29	Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID	
BA98087C				1/4	0.27	5/8	2.52	1.10	0.09	0.50	0.28						
BA98087D				1/4	0.27	3/4	2.64	1.10	0.09	0.50	0.28						
BA98088				5/16	0.33	3/4	2.87	1.10	0.10	0.60	0.32						
BA98088A	2	#4 FLEX, 4 DLO	2-6	3/8	0.41	1	3.07	1.10	0.10	0.60	0.38	BROWN	U2CRT	ILD - 7	ILD - 33		
BA98088B				1/4	0.27	5/8	2.52	1.10	0.10	0.60	0.28						
BA98088C				1/4	0.27	3/4	2.64	1.10	0.10	0.60	0.28						
BA98088D				1/4	0.27	1	3.07	1.10	0.10	0.60	0.38						
BA98088E				3/8	0.41	3/4	2.87	1.10	0.10	0.60	0.31						
BA98088F				3/8	0.41	1-3/4	4.25	1.10	0.10	0.60	0.62						

Copper, Two Hole, Long Barrel Compression Lug, Break-Away

Catalog ID	Wire Size	Alt Wire Size	Range Taking	Stud Size	Stud Hole Dia.	Hole Spacing	Dimensions In Inches					Color Code	• Installation Tooling		Dieless	
							L	B	C	D	E		Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	Ilco ILC-12-N, ILC-12-H-N, ILCB-12		
BA98091	1	#2 FLEX, 2 DLO	1-6	1/4	0.27	5/8	2.56	1.10	0.11	0.67	0.28	GREEN	U1CRT U4CABT	ILD - 7	ILD - 37	Burndy Dieless - PAT444S & PAT4PC-834LI.
BA98091A				3/8	0.41	1	3.11	1.10	0.11	0.67	0.38					
BA98091B				1/4	0.27	3/4	2.68	1.10	0.11	0.67	0.28					
BA98091C				5/16	0.33	7/8	2.91	1.10	0.11	0.67	0.32					
BA98092				3/8	0.41	7/8	2.91	1.10	0.11	0.67	0.32					
BA98093				1/2	0.53	1-3/4	4.29	1.10	0.10	0.75	0.62					
BA98094	1/0	#1 FLEX, 1 DLO	1/0-6	5/16	0.33	7/8	3.01	1.20	0.13	0.74	0.32	PINK	U25RT U2CART	ILD - 8	ILD - 42	Ilco Dieless - IDT-6, IDT-6H, IDTB-6, IDTB-6-LI-O, TB-6DF1000-P, IDT-12-N, IVTB-6
BA98094A				3/8	0.41	7/8	3.01	1.20	0.13	0.74	0.31					
BA98095				3/8	0.41	1	3.21	1.20	0.13	0.74	0.38					
BA98095A				1/4	0.27	5/8	2.66	1.20	0.13	0.74	0.28					
BA98095B				3/8	0.41	3/4	3.01	1.20	0.13	0.74	0.32					
BA98095C				3/8	0.41	1-3/4	4.39	1.20	0.13	0.74	0.62					
BA98096	2/0	#1/0 FLEX, 1/0 DLO	2/0-4	1/2	0.53	1-3/4	4.39	1.20	0.13	0.74	0.62	BLACK	U26RT	ILD - 10	ILD - 45	Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID
BA98097				3/8	0.41	1	3.43	1.38	0.12	0.81	0.38					
BA98097A				1/4	0.27	3/4	2.99	1.38	0.12	0.81	0.28					
BA98097B				1/4	0.27	5/8	2.87	1.38	0.12	0.81	0.28					
BA98097C				1/4	0.27	1	3.43	1.38	0.12	0.81	0.38					
BA98097D				3/8	0.41	1-3/4	4.61	1.38	0.12	0.81	0.62					
BA98098	3/0	#2/0 FLEX, 2/0 DLO	3/0-2	1/2	0.53	1-3/4	4.61	1.38	0.12	0.81	0.62	ORANGE	U27RT	ILD - 10	ILD - 50	Burndy Dieless - PAT444S & PAT4PC-834LI.
BA98099				5/16	0.33	1	3.50	1.38	0.13	0.90	0.32					
BA98099A				3/8	0.41	1	3.50	1.38	0.13	0.90	0.38					
BA98099B				1/4	0.27	3/4	3.07	1.38	0.13	0.90	0.28					
BA98099C				1/4	0.27	5/8	2.95	1.38	0.13	0.90	0.28					
BA98100				3/8	0.41	1-3/4	4.69	1.38	0.13	0.90	0.62					
BA98100A	4/0	#3/0 FLEX, 3/0 DLO	4/0-1	1/2	0.53	1-3/4	4.69	1.38	0.13	0.90	0.62	PURPLE	U28RT	ILD - 12	ILD - 54	Ilco Dieless - IDT-6, IDT-6H, IDTB-6, IDTB-6-LI-O, TB-6DF1000-P, IDT-12-N, IVTB-6
BA98101				3/8	0.41	1	3.54	1.42	0.13	1.00	0.38					
BA98101A				1/4	0.27	3/4	3.11	1.42	0.13	1.00	0.28					
BA98101B				1/4	0.27	5/8	2.99	1.42	0.13	1.00	0.28					
BA98101C				3/8	0.41	1-3/4	4.72	1.42	0.13	1.00	0.62					
BA98102				1/2	0.53	1-3/4	4.72	1.42	0.13	1.00	0.62					
BA98103	250	#4/0 FLEX, 4/0 DLO	250-1	3/8	0.41	1	3.78	1.61	0.15	1.09	0.38	YELLOW	U29RT	ILD - 13	ILD - 62	Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID
BA98104				1/2	0.53	1-3/4	4.96	1.61	0.15	1.09	0.62					
BA98105	300	250 G,H,FLEX	300-2/0	1/2	0.53	1-3/4	5.31	1.97	0.15	1.19	0.62	WHITE	U30RT U28ART	ILD - 14	ILD - 66	Burndy Dieless - PAT444S & PAT4PC-834LI.
BA98105A				3/8	0.41	1	4.13	1.97	0.15	1.19	0.38					
BA98106	350	250 G,H,I,K,M,FLEX 262 DLO	350-3/0	1/2	0.53	1-3/4	5.39	1.97	0.17	1.28	0.62	RED	-	ILD - 14	ILD - 71	Ilco Dieless - IDT-6, IDT-6H, IDTB-6, IDTB-6-LI-O, TB-6DF1000-P, IDT-12-N, IVTB-6
BA98106A																