

Copper, Two Hole, Long Barrel Compression Lug, Slotted Tang, Break-Away

Features

- Manufactured from high strength seamless copper tubing
- Chamfered entry
- Color coded die index and crimp marks
- Electro-Tin plated for corrosion resistance
- UL486A/B Listed for Wire Connectors
- UL467 Listed for grounding and bonding applications
- UL Listed and CSA Certified with competitor's compression tools
- Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

We Supply



- Prefix 'P' for inspection window (eg. PXXXXX)
- Prefix 'F' for flared entry (eg. FXXXXX)

Standard Finish

- Electro-tin plated

Standard Material

- Copper

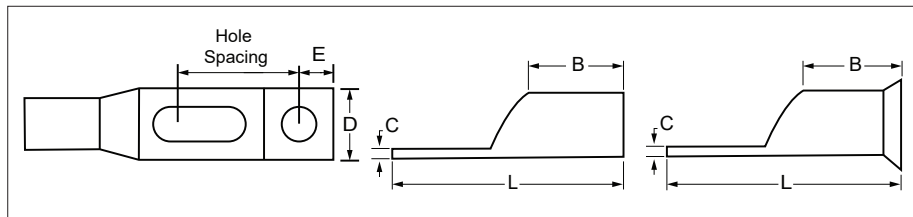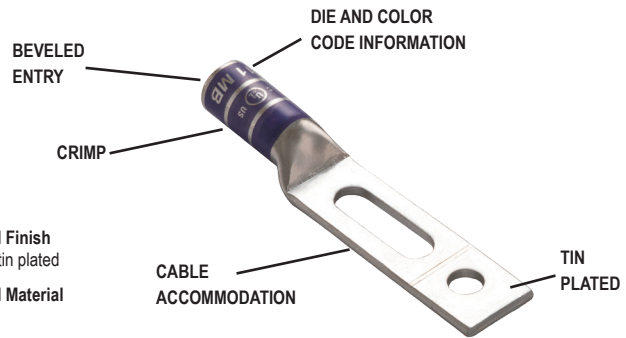

For Use With Copper Conductor Only

Catalog ID	Wire Size	Alt Wire Size	Range Taking	Stud Size	Stud Hole Dia.	Hole Spacing	Dimensions In Inches					Color Code	• Installation Tooling			Dieless
							L	B	C	D	E		Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	Ilco ILC-12-N, ILC-12-H-N, ILCB-12		
STBA98083	8	#8 FLEX, 8 DLO	8-10	#10	0.20	5/8	2.19	0.81	0.08	0.42	0.28	RED	U8CTR	ILD - 2	ILD - 21	Burndy Dieless - PAT444S & PAT4PC-834LI.
STBA98084				1/4	0.27	5/8	2.19	0.81	0.08	0.42	0.28					
STBA98084B				1/4	0.27	1	2.74	0.81	0.06	0.55	0.38					
STBA98084C				1/4	0.27	3/4	2.74	0.81	0.08	0.42	0.38					
STBA98084D				3/8	0.41	1-3/4	2.30	0.81	0.06	0.42	0.32					
STBA98084A				3/8	0.41	1	3.92	0.81	0.06	0.55	0.62					
STBA98084E				5/16	0.33	1-3/4	3.92	0.81	0.08	0.55	0.62					
STBA98085	6	#6 FLEX, 6 DLO	6-8	1/4	0.27	5/8	2.36	0.98	0.08	0.42	0.28	BLUE	U5CRT U8CABT	ILD - 3	ILD - 24	Ilco Dieless - IDT-6, IDT-6H, IDTB-6, IDTB-6-LI-O, TB-6DF1000-P, IDT-12-N, IVTB-6
STBA98085A				1/4	0.27	1/2	2.24	0.98	0.08	0.42	0.28					
STBA98085B				1/2	0.53	1-3/4	4.09	0.98	0.08	0.83	0.62					
STBA98085C				1/4	0.27	3/4	2.48	0.98	0.08	0.42	0.28					
STBA98085D				3/8	0.41	1	2.91	0.98	0.06	0.55	0.38					
STBA98085E				3/8	0.41	3/4	2.72	0.98	0.06	0.55	0.32					
STBA98086				1/4	0.27	5/8	2.36	0.98	0.09	0.49	0.28					
STBA98086A	4	-	4-6	3/8	0.41	1	2.91	0.98	0.07	0.55	0.38	GRAY	U4CRT U6CABT	ILD - 4	ILD - 29	Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID
STBA98086B				1/4	0.27	3/4	2.48	0.98	0.09	0.49	0.28					
STBA98086C				5/16	0.33	1	2.91	0.98	0.07	0.55	0.38					
STBA98086D				1/4	0.27	1	2.91	0.98	0.09	0.49	0.38					
STBA98086E				3/8	0.41	3/4	2.91	0.98	0.07	0.55	0.28					
STBA98087				1/2	0.53	1-3/4	4.09	0.98	0.12	0.87	0.62					
STBA98087A				5/16	0.33	3/4	2.87	1.10	0.09	0.55	0.32					
STBA98087B	3	#4 FLEX, 4 DLO	3-6	3/8	0.41	1	3.07	1.10	0.08	0.59	0.38	WHITE	U2CRT	-	29	
STBA98087C				1/4	0.27	5/8	2.52	1.10	0.09	0.50	0.28					
STBA98087D				1/4	0.27	3/4	2.64	1.10	0.09	0.50	0.28					
STBA98088	2	#4 FLEX, 4 DLO	2-6	5/16	0.33	3/4	2.87	1.10	0.10	0.60	0.32	BROWN	U2CRT	ILD - 7	ILD - 33	
STBA98088A				3/8	0.41	1	3.07	1.10	0.10	0.60	0.38					
STBA98088B				1/4	0.27	5/8	2.52	1.10	0.10	0.60	0.28					
STBA98088C				1/4	0.27	3/4	2.64	1.10	0.10	0.60	0.28					
STBA98088D				1/4	0.27	1	3.07	1.10	0.10	0.60	0.38					
STBA98088E				3/8	0.41	3/4	2.87	1.10	0.10	0.60	0.31					
STBA98088F				3/8	0.41	1-3/4	4.25	1.10	0.10	0.60	0.62					
STBA98089				5/16	0.33	7/8	2.87	1.10	0.10	0.60	0.32					
STBA98089A				5/16	0.33	3/4	2.87	1.10	0.10	0.60	0.32					
STBA98090				1/2	0.53	1-3/4	4.25	1.10	0.08	0.81	0.62					

