

Copper, Heavy Duty, Starter Lug

Features

- Color coded die index and crimp marks
- Tin plating for corrosion resistance
- Connectors suitable for application upto 35 KV

Applications

- Used for compact, concentric, flexible class B, C, K and DLO & Flex lass H, G, M conductors

Material



- Copper

Finish

- Tin plated

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

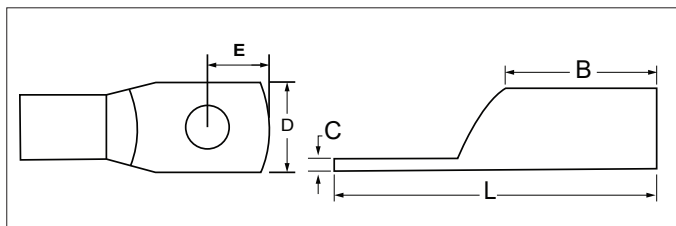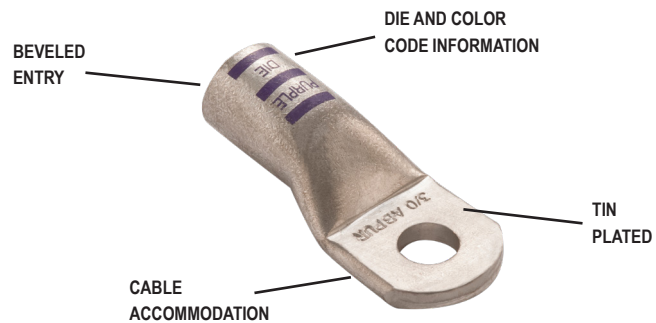

For Use With Copper Conductor Only

Catalog ID	Wire Size	Stud Size	Dimensions In Inches					Color Code
			L	B	C	D	E	
98201	8	1/4	1.12	0.39	0.08	0.47	0.26	RED
98202		5/16	1.38	0.39	0.05	0.59	0.39	
98203		3/8	1.54	0.39	0.05	0.67	0.47	
98204		1/2	1.65	0.39	0.04	0.75	0.51	
98205	6	1/4	1.31	0.51	0.11	0.47	0.25	BLUE
98206		5/16	1.48	0.51	0.08	0.59	0.34	
98207		3/8	1.63	0.51	0.07	0.67	0.41	
98208		1/2	1.77	0.51	0.07	0.75	0.47	
98209	4	1/4	1.48	0.59	0.12	0.55	0.29	GRAY
98210		5/16	1.65	0.59	0.10	0.63	0.39	
98211		3/8	1.81	0.59	0.09	0.71	0.47	
98212		1/2	1.89	0.59	0.08	0.75	0.51	
98213	1-2	1/4	1.85	0.79	0.16	0.79	0.39	PINK
98214		5/16	1.85	0.79	0.16	0.79	0.39	
98215		3/8	2.01	0.79	0.16	0.79	0.47	
98216		1/2	2.21	0.79	0.13	0.91	0.51	
98217	1/0	1/4	1.97	0.79	0.16	0.87	0.39	BLACK
98218		5/16	1.97	0.79	0.16	0.87	0.39	
98219		3/8	2.13	0.79	0.16	0.87	0.47	
98220		1/2	2.21	0.79	0.15	0.91	0.51	
98221	2/0	5/16	2.06	0.83	0.18	0.91	0.39	ORANGE
98222		3/8	2.21	0.83	0.18	0.91	0.47	
98223		1/2	2.23	0.83	0.18	0.91	0.51	
98224	3/0	3/8	2.36	0.98	0.18	1.02	0.47	PURPLE
98225		1/2	2.48	0.98	0.18	1.02	0.51	
98226	4/0	3/8	2.56	1.02	0.18	1.10	0.94	YELLOW
98227		1/2	2.56	1.02	0.18	1.10	0.94	

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)