

Copper, Heavy Duty, Starter Splice

Features

- Color coded die index and crimp marks
- Tin plating for corrosion resistance
- Connectors suitable for application upto 35 KV

Applications

- Used for compact, concentric, flexible class B, C, K and DLO & Flex lass H, G, M conductors

Standard Material

- Copper

Standard Finish



- Tin plated

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

We Supply

- Suffix 'T' for Tin plated used 982XXT

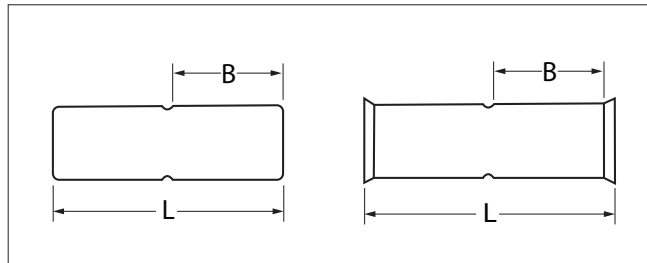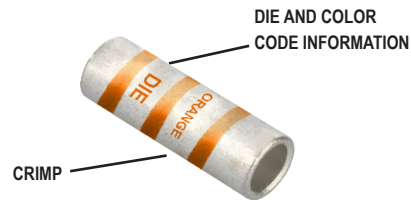

Catalog ID	CU Compact Class B,C,K	Expanded Range	Dlo & Flex Class H,G,M	Dimensions In Inches	Color Code
				L	
98228	8	--	8	1.18	RED
98229	6	6-8	7	1.38	BLUE
98230	4	4-6	5	1.57	GRAY
98231	1-2	1-6	2	1.97	PINK
98232	1/0	1/0-6	1	1.91	BLACK
98233	2/0	2/0-4	1/0	2.16	ORANGE
98234	3/0	3/0-2	2/0	3.36	PURPLE
98235	4/0	4/0-1	3/0	2.56	YELLOW

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Copper, Standard Wall, Starter Splice

Features

- Color coded die index and crimp marks
- Tin plating for corrosion resistance

Applications

- Used for compact, concentric, flexible class DLO

Standard Material

- Copper

Standard Finish



- Natural

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

We Supply

- Suffix 'T' for Tin plated used 983XXT

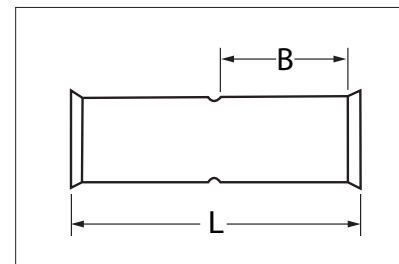

Catalog ID	CU Compact Class B,C,K	Expanded Range	Dlo & Flex Class H,G,M	Dimensions In Inches	Flare Length
				L	
98333	8	--	8	1.10	0.10
98334	6	6-8	7	1.15	0.10
98335	4	4-6	5	1.22	0.10
98336	2	2-6	3	1.34	0.10
98337	1	1-6	2	1.34	0.10
98338	1/0	1/0-6	1	1.56	0.10
98339	2/0	2/0-4	1/0	1.81	0.10
98340	3/0	3/0-2	2/0	1.90	0.10
98341	4/0	4/0-1	3/0	2.46	0.10

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)