

Copper, One Hole, Standard Barrel Metric Compression Lug

Features

- Made of high conductivity copper tubing
- Tinned for corrosion resistance
- With inspection hole to ensure appropriate conductor insertion

Material


- Copper

Finish

- Tin plated

Electrical Rating

- Voltage Rating: 600 V
- Temperature Rating: 90°C

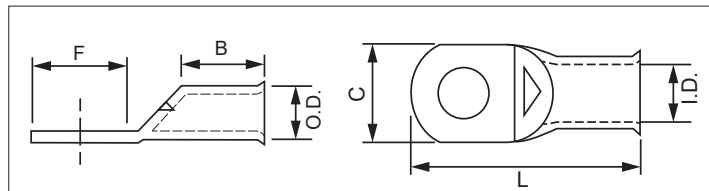

Catalog ID	Cable mm²	Stud Size	Dimensions In MM					
			I.D.	O.D.	L	B	C	F
96001	1.5	M4	1.80	3.70	17.00	5.50	8.00	9.50
96002	1.5	M5	1.80	3.70	17.00	5.50	8.00	9.50
96003	1.5	M6	1.80	3.70	19.00	5.50	9.50	11.50
96004	2.5	M4	2.40	4.00	21.50	8.00	8.50	11.50
96005	2.5	M5	2.40	4.00	21.50	8.00	8.50	11.50
96006	2.5	M6	2.40	4.00	21.50	8.00	9.50	11.50
96007	2.5	M8	2.40	4.00	24.00	8.00	11.00	14.00
96008	4	M4	3.10	4.80	21.00	8.00	9.50	11.00
96009	4	M5	3.10	4.80	21.00	8.00	9.50	11.00
96010	4	M6	3.10	4.80	21.00	8.00	10.00	11.00
96011	4	M8	3.10	4.80	25.00	8.00	11.00	15.00
96012	6	M5	3.80	5.50	23.00	10.0	9.50	10.00
96013	6	M6	3.80	5.50	27.00	10.0	10.50	14.00
96014	6	M8	3.80	5.50	27.00	10.0	11.00	14.00
96015	6	M10	3.80	5.50	32.00	10.0	14.50	19.00
96016	10	M5	4.50	6.20	25.50	10.0	10.50	12.50
96017	10	M6	4.50	6.20	25.50	10.0	10.50	12.50
96018	10	M8	4.50	6.20	27.50	10.0	11.50	13.50
96019	10	M10	4.70	7.10	32.00	10.0	14.50	18.00
96020	10	M12	4.70	7.10	36.00	10.0	18.00	22.00
96021	16	M5	5.40	7.10	31.00	13.0	11.50	14.00
96022	16	M6	5.40	7.10	31.00	13.0	11.50	14.00
96023	16	M8	5.40	7.10	31.00	13.0	11.50	14.00
96024	16	M10	5.50	7.90	35.00	13.0	14.50	18.00
96025	16	M12	5.50	7.90	39.00	13.0	18.00	22.00
96026	20	M8	6.00	7.70	32.50	13.0	11.50	15.50
96027	25	M6	6.80	8.80	33.00	14.0	12.50	15.00
96028	25	M8	6.80	8.80	33.00	14.0	13.00	15.00
96029	25	M10	6.80	8.80	36.50	14.0	14.50	18.50
96030	25	M12	6.80	8.80	40.00	14.0	16.50	22.00
96031	35	M6	8.20	10.60	36.00	14.00	15.00	17.00
96032	35	M8	8.20	10.60	36.00	14.00	15.00	18.00
96033	35	M10	8.20	10.60	39.00	14.00	16.00	20.00
96034	35	M12	8.20	10.60	47.00	14.00	21.00	26.50
96034A	35	M14	8.20	10.60	47.00	14.00	21.00	26.50
96035	50	M6	9.50	12.40	45.00	18.00	18.00	21.00
96036	50	M8	9.50	12.40	45.00	18.00	18.00	21.00
96037	50	M10	9.50	12.40	45.00	18.00	18.00	21.00
96038	50	M12	9.50	12.40	52.00	22.00	21.00	24.00
96039	50	M14	9.50	12.40	52.00	18.00	22.00	28.00
96040	50	M16	9.50	12.40	52.00	18.00	22.00	28.00
96041	70	M6	11.20	14.70	52.00	20.00	21.00	25.00
96042	70	M8	11.20	14.70	52.00	20.00	21.00	25.00

Copper, One Hole, Standard Barrel Metric Compression Lug

Catalog ID	Cable mm²	Stud Size	Dimensions In MM					
			I.D	O.D	L	B	C	F
96043	70	M10	11.20	14.70	52.00	20.00	21.00	25.00
96044	70	M12	11.20	14.70	52.00	20.00	21.00	25.00
96045	70	M14	11.20	14.70	55.00	20.00	25.00	28.00
96046	70	M16	11.20	14.70	55.00	20.00	25.00	28.00
96047	70	M20	11.20	14.70	57.00	20.00	28.00	30.00
96048	95	M8	13.50	17.40	57.00	22.00	25.00	26.00
96049	95	M10	13.50	17.40	57.00	22.00	25.00	26.00
96050	95	M12	13.50	17.40	57.00	22.00	25.00	26.00
96051	95	M14	13.50	17.40	57.00	22.00	26.00	26.00
96052	95	M16	13.50	17.40	60.00	22.00	26.00	29.00
96053	95	M20	13.50	17.40	60.00	22.00	28.00	29.00
96054	120	M8	15.00	19.40	63.00	24.00	28.00	29.00
96055	120	M10	15.00	19.40	63.00	24.00	28.00	29.00
96056	120	M12	15.00	19.40	63.00	24.00	28.00	29.00
96057	120	M14	15.00	19.40	63.00	24.00	28.00	29.00
96058	120	M16	15.00	19.40	63.00	24.00	28.00	29.00
96059	120	M20	15.00	19.40	70.00	24.00	31.00	36.00
96060	150	M8	16.50	21.20	71.00	29.00	30.50	31.00
96061	150	M10	16.50	21.20	71.00	29.00	30.50	31.00
96062	150	M12	16.50	21.20	71.00	29.00	30.50	31.00
96063	150	M14	16.50	21.20	71.00	29.00	30.50	31.00
96064	150	M16	16.50	21.20	71.00	29.00	30.50	31.00
96065	150	M20	16.50	21.20	71.00	29.00	30.50	31.00
96066	185	M10	18.50	23.50	79.00	34.00	34.00	33.00
96067	185	M12	18.50	23.50	79.00	34.00	34.00	33.00
96068	185	M14	18.50	23.50	79.00	34.00	34.00	33.00
96069	185	M16	18.50	23.50	79.00	34.00	34.00	33.00
96070	185	M20	18.50	23.50	79.00	34.00	34.00	33.00
96071	240	M10	21.00	26.50	93.00	39.00	38.00	40.00
96072	240	M12	21.00	26.50	93.00	39.00	38.00	40.00
96073	240	M14	21.00	26.50	93.00	39.00	38.00	40.00
96074	240	M16	21.00	26.50	93.00	39.00	38.00	40.00
96075	240	M20	21.00	26.50	93.00	39.00	38.00	40.00
96076	300	M10	23.50	30.00	101.00	44.00	43.00	42.00
96077	300	M12	23.50	30.00	101.00	44.00	43.00	42.00
96078	300	M14	23.50	30.00	101.00	44.00	43.00	42.00
96079	300	M16	23.50	30.00	101.00	44.00	43.00	42.00
96080	300	M20	23.50	30.00	101.00	44.00	43.00	42.00
96081	400	M10	26.80	34.80	116.00	47.00	50.00	51.00
96082	400	M12	26.80	34.80	116.00	47.00	50.00	51.00
96083	400	M14	26.80	34.80	116.00	47.00	50.00	51.00
96084	400	M16	26.80	34.80	116.00	47.00	50.00	51.00
96085	400	M20	26.80	34.80	116.00	47.00	50.00	51.00
96086	500	M16	30.00	39.00	126.00	52.00	55.50	54.00
96087	500	M20	30.00	39.00	126.00	52.00	55.50	54.00
96088	630	M16	35.00	45.00	146.00	59.00	64.50	65.00
96089	630	M20	35.00	45.00	146.00	59.00	64.50	65.00
96090	800	-	39.00	50.60	171.00	78.00	72.50	68.00
96091	1000	-	43.00	56.20	202.00	90.00	80.50	87.00