

Copper, Two Hole, Standard Barrel Metric Compression Lug

Features

- Made of high conductivity copper tubing
- Tinned for corrosion resistance
- With inspection hole to ensure appropriate conductor insertion

Material


- Copper

Finish

- Tin plated

Electrical Rating

- Voltage Rating: 600 V
- Temperature Rating: 90°C

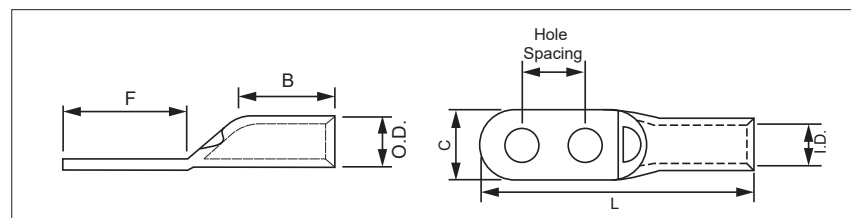

Catalog ID	Cable mm ²	Stud Size	Hole Spacing	Dimensions in MM					
				I.D	O.D	L	B	C	F
96201	10	M5	14.00	4.50	6.20	39.00	10.00	10.50	26.00
96202	10	M6	14.00	4.50	6.20	39.00	10.00	10.50	26.00
96203	10	M8	14.00	4.50	6.20	40.00	10.00	11.50	26.00
96204	10	M10	14.00	4.70	7.10	40.00	10.00	14.50	26.00
96205	10	M12	14.00	4.70	7.10	40.00	10.00	18.00	26.00
96206	16	M5	16.00	5.40	7.10	46.50	13.00	11.50	29.50
96207	16	M6	16.00	5.40	7.10	46.50	13.00	11.50	29.50
96208	16	M8	16.00	5.40	7.10	46.50	13.00	11.50	29.50
96209	16	M10	16.00	5.50	7.90	46.50	13.00	14.50	29.50
96210	16	M12	16.00	5.50	7.90	46.50	13.00	18.00	29.50
96211	25	M6	16.00	6.80	8.80	50.50	14.00	12.50	32.50
96212	25	M8	16.00	6.80	8.80	50.50	14.00	13.00	32.50
96213	25	M10	16.00	6.80	8.80	50.50	14.00	14.50	32.50
96214	25	M12	16.00	6.80	8.80	50.50	14.00	16.50	32.50
96215	35	M6	19.00	8.20	10.60	55.50	14.00	15.00	36.50
96216	35	M8	19.00	8.20	10.60	55.50	14.00	15.00	36.50
96217	35	M10	19.00	8.20	10.60	55.50	14.00	16.00	36.50
96218	35	M12	19.00	8.20	10.60	55.50	15.50	21.00	36.50
96219	50	M6	22.00	9.50	12.40	65.70	18.00	18.00	41.70
96220	50	M8	22.00	9.50	12.40	65.70	18.00	18.00	41.70
96221	50	M10	22.00	9.50	12.40	65.70	18.00	18.00	41.70
96222	50	M12	22.00	9.50	12.40	69.70	22.00	21.00	41.70
96223	50	M14	22.00	9.50	12.40	65.70	18.00	22.00	41.70
96224	50	M16	22.00	9.50	12.40	65.70	18.00	22.00	41.70
96225	70	M6	44.40	11.20	14.70	93.40	20.00	21.00	66.40
96226	70	M8	44.40	11.20	14.70	93.40	20.00	21.00	66.40
96227	70	M10	44.40	11.20	14.70	93.40	20.00	21.00	66.40
96228	70	M12	44.40	11.20	14.70	93.40	20.00	21.00	66.40
96229	70	M14	44.40	11.20	14.70	93.40	20.00	21.00	66.40
96230	70	M16	44.40	11.20	14.70	93.40	20.00	25.00	66.40
96231	70	M20	44.40	11.20	14.70	93.40	20.00	28.00	66.40
96232	95	M8	44.40	13.50	17.40	97.40	22.00	25.00	66.40
96233	95	M10	44.40	13.50	17.40	97.40	22.00	25.00	66.40
96234	95	M12	44.40	13.50	17.40	97.40	22.00	25.00	66.40
96235	95	M14	44.40	13.50	17.40	97.40	22.00	26.00	66.40
96236	95	M16	44.40	13.50	17.40	97.40	22.00	26.00	66.40
96237	95	M20	44.40	13.50	17.40	97.40	22.00	28.00	66.40
96238	120	M8	44.40	15.00	19.40	108.00	24.00	28.00	74.00
96239	120	M10	44.40	15.00	19.40	108.00	24.00	28.00	74.00
96240	120	M12	44.40	15.00	19.40	108.00	24.00	28.00	74.00
96241	120	M14	44.40	15.00	19.40	108.00	24.00	28.00	74.00
96242	120	M16	44.40	15.00	19.40	108.00	24.00	28.00	74.00

Copper, Two Hole, Standard Barrel Metric Compression Lug

Catalog ID	Cable mm ²	Stud Size	Hole Spacing	Dimensions In MM					
				I.D	O.D	L	B	C	F
96243	120	M20	44.40	15.00	19.40	108.00	24.00	31.00	74.00
96244	150	M8	44.40	16.50	21.20	118.50	29.00	30.50	78.50
96245	150	M10	44.40	16.50	21.20	118.50	29.00	30.50	78.50
96246	150	M12	44.40	16.50	21.20	118.50	29.00	30.50	78.50
96247	150	M14	44.40	16.50	21.20	118.50	29.00	30.50	78.50
96248	150	M16	44.40	16.50	21.20	118.50	29.00	30.50	78.50
96249	150	M20	44.40	16.50	21.20	118.50	29.00	30.50	78.50
96250	185	M10	44.40	18.50	23.50	120.00	34.00	34.00	74.00
96251	185	M12	44.40	18.50	23.50	120.00	34.00	34.00	74.00
96252	185	M14	44.40	18.50	23.50	120.00	34.00	34.00	74.00
96253	185	M16	44.40	18.50	23.50	120.00	34.00	34.00	74.00
96254	185	M20	44.40	18.50	23.50	120.00	34.00	34.00	74.00
96255	240	M10	44.40	21.00	26.50	132.50	39.00	38.00	79.50
96256	240	M12	44.40	21.00	26.50	132.50	39.00	38.00	79.50
96257	240	M14	44.40	21.00	26.50	132.50	39.00	38.00	79.50
96258	240	M16	44.40	21.00	26.50	132.50	39.00	38.00	79.50
96259	240	M20	44.40	21.00	26.50	132.50	39.00	38.00	79.50
96260	300	M10	44.40	23.50	30.00	150.50	44.00	43.00	91.50
96261	300	M12	44.40	23.50	30.00	150.50	44.00	43.00	91.50
96262	300	M14	44.40	23.50	30.00	150.50	44.00	43.00	91.50
96263	300	M16	44.40	23.50	30.00	150.50	44.00	43.00	91.50
96264	300	M20	44.40	23.50	30.00	150.50	44.00	43.00	91.50
96265	400	M10	44.40	26.80	34.80	156.50	47.00	50.00	91.50
96266	400	M12	44.40	26.80	34.80	156.50	47.00	50.00	91.50
96267	400	M14	44.40	26.80	34.80	156.50	47.00	50.00	91.50
96268	400	M16	44.40	26.80	34.80	156.50	47.00	50.00	91.50
96269	400	M20	44.40	26.80	34.80	156.50	47.00	50.00	91.50
96270	500	M16	44.40	30.00	39.00	164.50	52.00	55.50	92.50
96271	500	M20	44.40	30.00	39.00	164.50	52.00	55.50	92.50
96272	630	M16	44.40	35.00	45.00	176.50	59.00	64.50	95.50
96273	630	M20	44.40	35.00	45.00	176.50	59.00	64.50	95.50