

Copper, Two Hole, Long Barrel Metric Compression Lug

Features

- Made of high conductivity copper tubing
- Tinned for corrosion resistance
- With inspection hole to ensure appropriate conductor insertion

Material


- Copper

Finish

- Tin plated

Electrical Rating

- Voltage Rating: 600 V
- Temperature Rating: 90°C

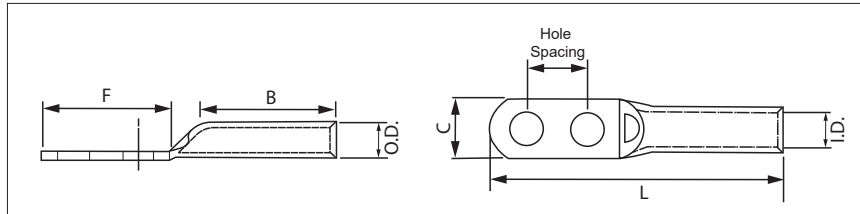

Catalog ID	Cable mm ²	Stud Size	Hole Spacing	Dimensions In MM					
				I.D.	O.D.	L	B	C	F
96301	10	M6	14.00	4.50	6.20	47.00	18.00	10.50	26.00
96302	10	M8	14.00	4.50	6.20	48.00	18.00	11.50	26.00
96303	10	M10	14.00	4.70	7.10	48.00	18.00	14.50	26.00
96304	10	M12	14.00	4.70	7.10	48.00	18.00	18.00	26.00
96305	16	M5	14.00	5.40	7.10	52.00	22.00	11.50	26.00
96306	16	M6	16.00	5.40	7.10	55.50	22.00	11.50	29.50
96307	16	M8	16.00	5.40	7.10	55.50	22.00	11.50	29.50
96308	16	M10	16.00	5.50	7.90	55.50	22.00	14.50	29.50
96309	16	M12	16.00	5.50	7.90	55.50	22.00	18.00	29.50
96310	20	M8	16.00	6.00	7.70	56.50	23.00	11.50	29.50
96311	25	M6	16.00	6.80	8.80	59.50	23.00	12.50	32.50
96312	25	M8	16.00	6.80	8.80	59.50	23.00	13.00	32.50
96313	25	M10	16.00	6.80	8.80	59.50	23.00	14.50	32.50
96314	25	M12	16.00	6.80	8.80	59.50	23.00	16.50	32.50
96315	35	M6	19.00	8.20	10.60	64.50	23.00	15.00	36.50
96316	35	M8	19.00	8.20	10.60	64.50	23.00	15.00	36.50
96317	35	M10	19.00	8.20	10.60	64.50	23.00	16.00	36.50
96318	35	M12	19.00	8.20	10.60	64.50	23.00	21.00	36.50
96319	50	M6	22.00	9.50	12.40	76.20	28.50	18.00	41.70
96320	50	M8	22.00	9.50	12.40	76.20	28.50	18.00	41.70
96321	50	M10	22.00	9.50	12.40	76.20	28.50	18.00	41.70
96322	50	M12	22.00	9.50	12.40	76.20	28.50	21.00	41.70
96323	50	M14	22.00	9.50	12.40	76.20	28.50	22.00	41.70
96324	50	M16	22.00	9.50	12.40	76.20	28.50	22.00	41.70
96325	70	M6	44.40	11.20	14.70	101.90	28.50	21.00	66.40
96326	70	M8	44.40	11.20	14.70	101.90	28.50	21.00	66.40
96327	70	M10	44.40	11.20	14.70	101.90	28.50	21.00	66.40
96328	70	M12	44.40	11.20	14.70	101.90	28.50	21.00	66.40
96329	70	M14	44.40	11.20	14.70	101.90	28.50	25.00	66.40
96330	70	M16	44.40	11.20	14.70	101.90	28.50	25.00	66.40
96331	70	M20	44.40	11.20	14.70	101.90	28.50	28.00	66.40
96332	95	M8	44.40	13.50	17.40	103.90	28.50	25.00	66.40
96333	95	M10	44.40	13.50	17.40	103.90	28.50	25.00	66.40
96334	95	M12	44.40	13.50	17.40	103.90	28.50	25.00	66.40
96335	95	M14	44.40	13.50	17.40	103.90	28.50	26.00	66.40
96336	95	M16	44.40	13.50	17.40	103.90	28.50	26.00	66.40
96337	95	M20	44.40	13.50	17.40	103.90	28.50	28.00	66.40
96338	120	M8	44.40	15.00	19.40	120.00	36.00	28.00	74.00
96339	120	M10	44.40	15.00	19.40	120.00	36.00	28.00	74.00
96340	120	M12	44.40	15.00	19.40	120.00	36.00	28.00	74.00
96341	120	M14	44.40	15.00	19.40	120.00	36.00	28.00	74.00
96342	120	M16	44.40	15.00	19.40	120.00	36.00	28.00	74.00

Copper, Two Hole, Long Barrel Metric Compression Lug

Catalog ID	Cable mm²	Stud Size	Hole Spacing	Dimensions In MM					
				I.D	O.D	L	B	C	F
96343	120	M20	44.40	15.00	19.40	120.00	36.00	31.00	74.00
96344	150	M8	44.40	16.50	21.20	128.50	39.00	30.50	78.50
96345	150	M10	44.40	16.50	21.20	128.50	39.00	30.50	78.50
96346	150	M12	44.40	16.50	21.20	128.50	39.00	30.50	78.50
96347	150	M14	44.40	16.50	21.20	128.50	39.00	30.50	78.50
96348	150	M16	44.40	16.50	21.20	128.50	39.00	30.50	78.50
96349	150	M20	44.40	16.50	21.20	128.50	39.00	30.50	78.50
96350	185	M10	44.40	18.50	23.50	125.00	39.00	34.00	74.00
96351	185	M12	44.40	18.50	23.50	125.00	39.00	34.00	74.00
96352	185	M14	44.40	18.50	23.50	125.00	39.00	34.00	74.00
96353	185	M16	44.40	18.50	23.50	125.00	39.00	34.00	74.00
96354	185	M20	44.40	18.50	23.50	125.00	39.00	34.00	74.00
96355	240	M10	44.40	21.00	26.50	136.50	43.00	38.00	79.50
96356	240	M12	44.40	21.00	26.50	136.50	43.00	38.00	79.50
96357	240	M14	44.40	21.00	26.50	136.50	43.00	38.00	79.50
96358	240	M16	44.40	21.00	26.50	136.50	43.00	38.00	79.50
96359	240	M20	44.40	21.00	26.50	136.50	43.00	38.00	79.50
96360	300	M10	44.40	23.50	30.00	166.50	60.00	43.00	91.50
96361	300	M12	44.40	23.50	30.00	166.50	60.00	43.00	91.50
96362	300	M14	44.40	23.50	30.00	166.50	60.00	43.00	91.50
96363	300	M16	44.40	23.50	30.00	166.50	60.00	43.00	91.50
96364	300	M20	44.40	23.50	30.00	166.50	60.00	43.00	91.50
96365	400	M10	44.40	26.80	34.80	174.50	65.00	50.00	91.50
96366	400	M12	44.40	26.80	34.80	174.50	65.00	50.00	91.50
96367	400	M14	44.40	26.80	34.80	174.50	65.00	50.00	91.50
96368	400	M16	44.40	26.80	34.80	174.50	65.00	50.00	91.50
96369	400	M20	44.40	26.80	34.80	174.50	65.00	50.00	91.50
96370	500	M16	44.40	30.00	39.00	179.50	67.00	55.50	92.50
96371	500	M20	44.40	30.00	39.00	179.50	67.00	55.50	92.50
96372	630	M16	44.40	35.00	45.00	187.50	70.00	64.50	95.50
96373	630	M20	44.40	35.00	45.00	187.50	70.00	64.50	95.50