

Copper, Compression C Tap, Thin Wall

Features

- Manufactured from high conductivity copper
- Range taking
- Color coded for proper crimp die selection
- Provides maximum conductivity and low contact resistance
- Direct burial in earth or concrete
- Low installation cost
- Compact size allows for easy taping and insulation of connection
- Applications include copper tapping, Splicing/pig tailing
- Allows for 2 continuous parallel conductor

Standard Material


- Copper

Standard Finish

- Natural

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

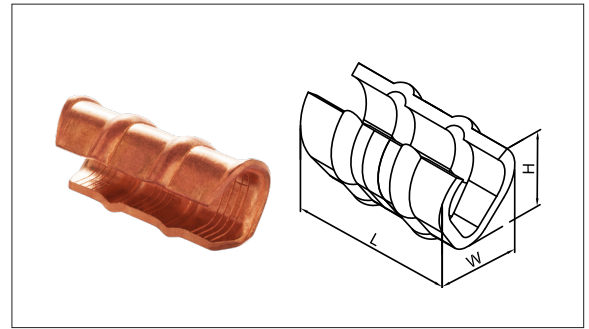

Catalog ID	Conductor Range		Strip Length	Dimensions In Inches			Color Code
	Run	Tap		L	W	H	
23101	12 Str	14 Sol-12 Str	1/2	0.33	0.31	0.28	RED
23102	10 Str	10 Str	5/8	0.61	0.38	0.36	BLUE
	8 Str	12 Str					
23103	6 Str	10-12 Str	5/8	0.61	0.46	0.43	GRAY
	8 Str	8-10 Str					
23104	4 Str	8-12 Str	1-1/4	1.17	0.65	0.48	BROWN
	6 Str	6-8 Str					
23105	4 Str	6-12 Str	1-1/4	1.17	0.70	0.56	GREEN
	5 Str	6-5 Str					
23106	4 Str	4 Str	1-1/4	1.17	0.76	0.58	PINK
23107	1 Str	-	2	1.75	0.78	0.64	BLACK
	2 Str	4 Str					
	4 Str	4 Str					
23108	1/0 Str	4 Str	2	1.75	0.90	0.75	ORANGE
	1 Str	4 Str					
	2 Str	2 Str					
23109	2/0 Str	4 Str	2	1.75	0.96	0.80	PURPLE
	1/0 Str	2 Str					
23110	3/0 Str	12-2 Str	2	1.75	1.09	0.85	YELLOW
	2/0 Str	2-1 Str					
	1/0 Str	1-1/0 Str					

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)