

Copper, Compression C Tap

Features

- Manufactured from high conductivity copper
- Range taking
- Direct burial in earth or concrete
- Low installation cost
- Color coded for proper crimp die selection
- Provides maximum conductivity and low contact resistance
- Provides easy identification and tooling recommendation
- Compact size allows for easy taping and insulation of connection
- Allows for 2 continuous parallel conductor
- Applications include copper tapping, Splicing/pig tailing

Standard Material


- Copper

Standard Finish

- Natural

Electrical Rating

- Voltage Rating: 600 V
- Maximum Circuit Rating: 35 kV
- Temperature Rating: 90°C

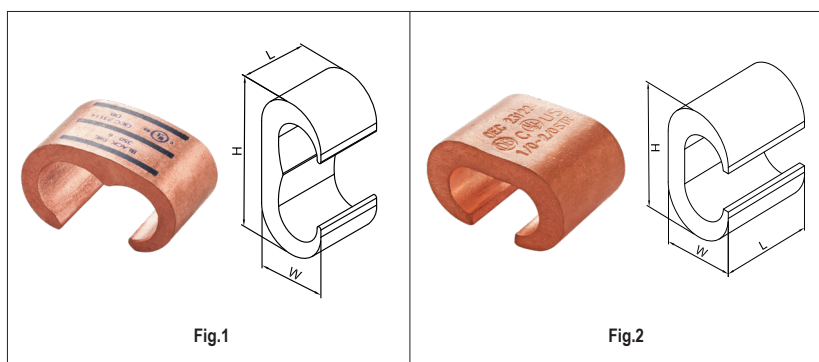

Catalog ID	Fig. No.	Conductor Range		Strip Length	Dimensions In Inches			Color Code
		Max Run	Min Tap		L	W	H	
23111	1	1 Str	1 Str	1	0.79	0.79	1.30	YELLOW
		1/0 Str	1/0-2 Str					
		2/0 Str	2/0-4 Str					
		3/0 Str-4/0 Str	1/0-6 Str					
		4/0 Str	1-8 Str					
23112	1	2/0 Str	2/0-1 Str	1	0.78	0.89	1.46	BLUE
		3/0 Str	3/0-2 Str					
		4/0 Str	4/0-4 Str					
		250 Str	1/0-8 Str					
23113	1	2/0 Str	2/0-1 Str	1-1/8	1.00	0.98	1.67	BLUE
		3/0 Str	3/0-2 Str					
		4/0 Str	4/0-4 Str					
		250 Str	3/0-6 Str					
		300 Str	2/0-8 Str					
23114	1	4/0 Str	4/0-2/0 Str	1-1/8	1.00	1.00	1.71	BROWN
		250 Kcmil	250-1 Str					
		300 Kcmil	4/0-4 Str					
		350 Kcmil	3/0-6 Str					
23115	1	250 Str	250 Str	1-5/16	1.28	1.11	1.85	BROWN
		300 Str	300-3/0 Str					
		350 Str	350-1/0 Str					
		400 Str	300-2 Str					
		450 Str	250-4 Str					
		500 Str	250-6 Str					
23116	1	350 Str	350-4/0 Str	1-5/16	1.29	1.18	2.20	WHITE
		400 Str	400-2/0 Str					
		450 Str	450-1 Str					
		500 Str	500-2 Str					
23117	1	750-500 Str	4/0-6 Str	2-3/4	2.75	1.34	2.75	-
		750 Str	750-4/0 Str					
23118	2	4 Str	6 Str	3/4	0.70	0.46	0.77	BG
23119	2	4-6 Str	4 Str	3/4	0.63	0.46	0.80	-
23120	2	2 Str	4-8 Str	3/4	0.75	0.60	0.98	-
23121	2	2 Str	2 Str	3/4	0.76	0.60	1.05	-
23122	2	1/0 Str	1/0 Str	1-1/8	0.95	0.80	1.35	-
		2/0 Str	2/0 Str					
23123	2	3/0 Str	1/0 Str	1-1/4	1.07	1.00	1.63	-
		4/0 Str						
23124	2	3/0 Str	3/0 Str	1-1/4	1.07	0.97	1.57	-
		4/0 Str	4/0 Str					

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)