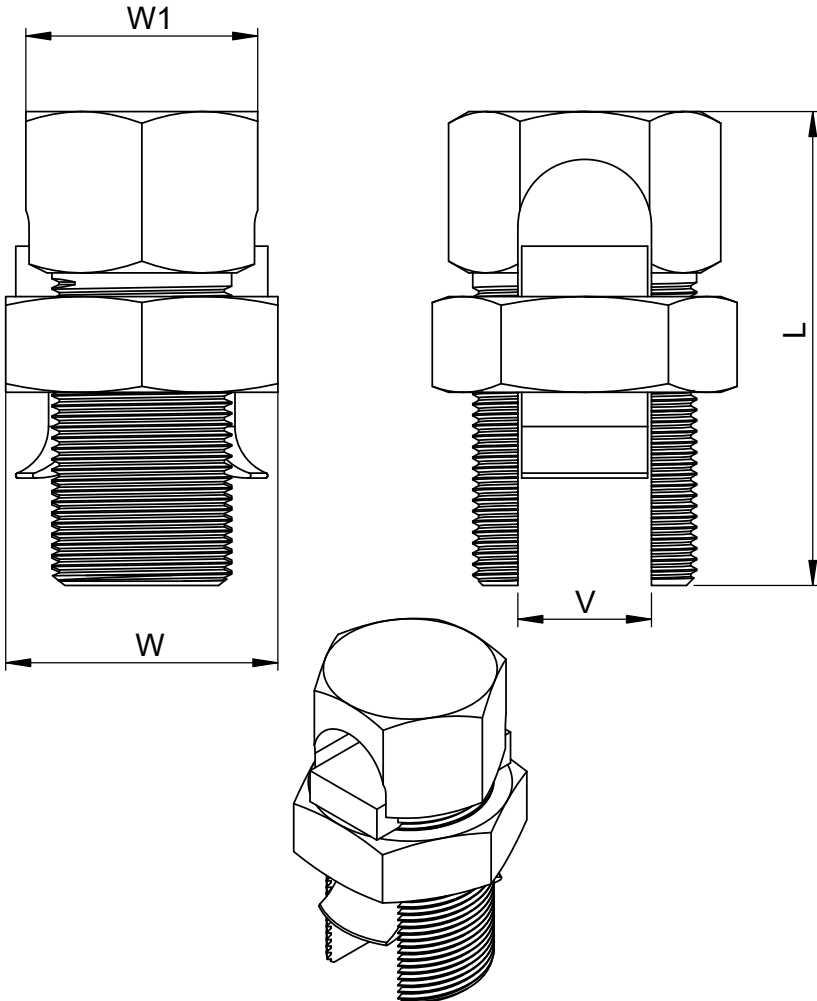


8		7		6		5		4		3		2		1	
Catalog Id	Range For Equal Main & Tap	Min.Tap With One Max Main	L	W	W1	V	Torque (in-lbs)	Treatment	NOTE : - Manufactured From High Strength Copper Alloy - UL486A/B Listed For Wire Connectors - UL467 Listed For Grounding And Bonding Applications - Provides Low Contact Resistance. - Provides Ease Of Installation - Standard Finish Natural. - Voltage Rating: 600 V. - Maximun Circuit Rating: 35 kV. - Temperature Rating: 90 °C 						
OEC-90	10-14 Str	14 Str	0.94 [24.00]	0.50 [12.70]	0.39 [10.00]	0.12 [3.20]	80	Natural							
OEC-15	8-14 Str / Sol		0.94 [24.00]	0.50 [12.70]	0.43 [11.00]	0.14 [3.70]	80								
OEC-17	6-14 Str / Sol		1.08 [27.50]	0.67 [17.00]	0.47 [12.00]	0.17 [4.30]	165								
OEC-20	4-14 Sol / Str		1.14 [29.00]	0.68 [17.50]	0.55 [14.00]	0.21 [5.50]									
OEC-22	2-14 Sol / Str		1.65 [42.00]	0.85 [21.75]	0.67 [17.00]	0.27 [7.00]	275								
OEC-23	2-14 Str		1.42 [36.00]	0.79 [20.00]	0.67 [17.00]	0.29 [7.40]									
OEC-25	1/0-14 Str		1.73 [44.00]	0.90 [23.00]	0.71 [18.00]	0.38 [9.70]	385								
OEC-26	2/0-14 Str		1.85 [47.00]	1.00 [25.50]	0.78 [20.00]	0.43 [11.00]									
OEC-27	3/0 - 8 Str	8 Str	2.10 [53.50]	1.14 [29.00]	1.02 [26.00]	0.47 [12.00]	500								
OEC-29	250 MCM - 8 Str	8 Str	2.40 [61.00]	1.18 [30.00]	1.08 [27.50]	0.59 [15.00]	650								
OEC-31	350 MCM - 1/0 Str	1/0 Str	2.70 [68.50]	1.60 [40.70]	1.45 [37.00]	0.70 [18.00]									
OEC-34	500 MCM - 2/0 Str	2/0 Str	2.99 [76.00]	1.67 [42.50]	1.53 [39.00]	0.85 [21.50]	825								
OEC-39	750 MCM - 4/0Str	4/0 Str	3.70 [94.00]	2.12 [54.00]	1.81 [46.00]	1.04 [26.50]	1000								
OEC-44	1000 - 4/0 Str	4/0 Str	3.94 [100.00]	2.54 [64.50]	2.16 [55.00]	1.24 [31.50]	1098								
MARKING ON HEAD															
THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT															
8		7		6		5		4		3		2		1	

TOLERANCES-UNLESS OTHERWISE SPECIFIED			
2 PL. DEC. ±.015	TRUE C.L. ±.015		
3 PL. DEC. ±.015	ANGLES ±.015		
DWG. NO. OSB-0001		PROJECTION: FIRST ANGLE	
MATERIAL Refer Note		SIZE A3	
FINISH Refer Note			

TOLERANCE		
L	W	V
±0.50	±0.50	±0.10
106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com		
TITLE: Copper, Split Bolt Connector		
Cat Id. OEC-90 - OEC-44		REV
DO NOT SCALE DRAWING		SHEET 1 OF 2