

Bus Bar Assembly Pattern "QQ"

Features

- Assembled with tamper proof bolts and insulators
- UL Listed
- All bars available with electro tin plating
- All holes are 7/16" unless otherwise specified

Applications

- Used as a common ground point and power application
- Used as a central consolidation point for tele communications and other low voltage system within room
- Typically located on wall or entry room where exterior ground enters building

Standard Material



- Copper

Standard Finish

- Natural / Tin plated

Certification

- cULus Listed UL467 (E178441)

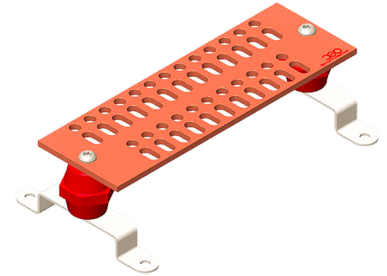

Catalog ID		L	W	T	Mounting Hole	Mounting Number of Point
Bus Bar Assembly without Tin Plating	Bus Bar Assembly with Tin Plating					
OEC-CBB-Q-0060414-U	OEC-CBB-Q-0060414-T	6"	4"	1/4"	0.438"	16
OEC-CBB-Q-0120414-U	OEC-CBB-Q-0120414-T	12"	4"	1/4"	0.438"	48
OEC-CBB-Q-0160414-U	OEC-CBB-Q-0160414-T	16"	4"	1/4"	0.438"	66
OEC-CBB-Q-0180414-U	OEC-CBB-Q-0180414-T	20"	4"	1/4"	0.438"	82
OEC-CBB-Q-0240414-U	OEC-CBB-Q-0240414-T	24"	4"	1/4"	0.438"	114
OEC-CBB-Q-0360414-U	OEC-CBB-Q-0360414-T	36"	4"	1/4"	0.438"	178

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)