

F

E

D

C

B

A

F

E




D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45 °C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For Use In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60004A	60004AC	60004A-BL	60004A-GR	2/0-14 Sol/Str	02	1.69 [42.92]	1.80 [45.72]	1.72 [43.68]	3/16	100	
63001B	63001BC	63001B-BL	63001B-GR	2/0-14 Sol/Str	03	2.54 [64.51]					
63002B	63002BC	63002B-BL	63002B-GR	2/0-14 Sol/Str	04	3.38 [85.85]					
63003B	63003BC	63003B-BL	63003B-GR	2/0-14 Sol/Str	05	4.23 [107.44]					
63004B	63004BC	63004B-BL	63004B-GR	2/0-14 Sol/Str	06	5.07 [128.77]					
63005B	63005BC	63005B-BL	63005B-GR	2/0-14 Sol/Str	07	5.92 [150.36]					
63006B	63006BC	63006B-BL	63006B-GR	2/0-14 Sol/Str	08	6.76 [171.70]					
63007B	63007BC	63007B-BL	63007B-GR	2/0-14 Sol/Str	09	7.61 [193.29]					
63008B	63008BC	63008B-BL	63008B-GR	2/0-14 Sol/Str	10	8.45 [214.63]					
63009B	63009BC	63009B-BL	63009B-GR	2/0-14 Sol/Str	11	9.30 [236.22]					
63010B	63010BC	63010B-BL	63010B-GR	2/0-14 Sol/Str	12	10.14 [257.55]					
63010B-13	63010BC-13	63010B-BL-13	63010B-GR-13	2/0-14 Sol/Str	13	10.99 [279.14]					
63010B-14	63010BC-14	63010B-BL-14	63010B-GR-14	2/0-14 Sol/Str	14	11.83 [300.48]					

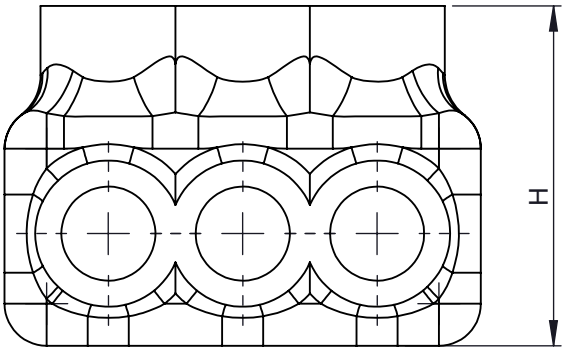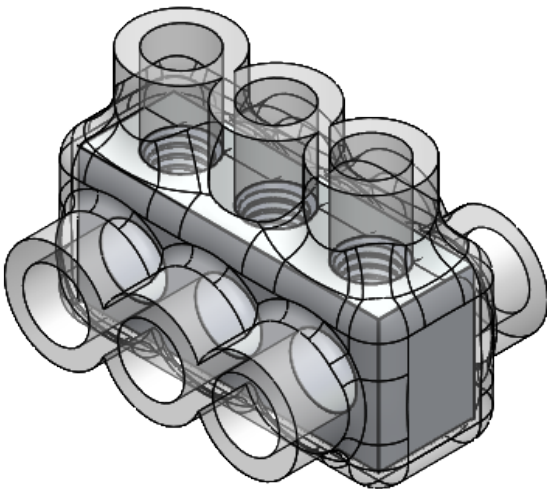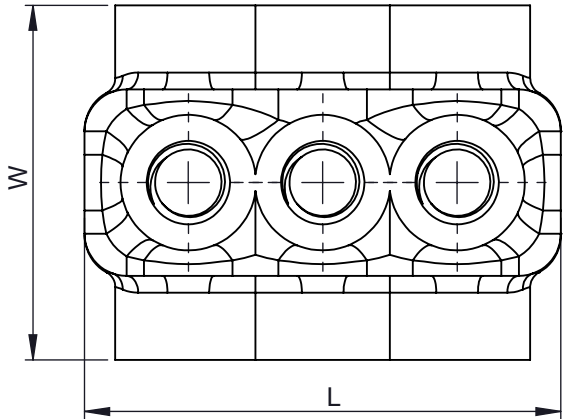

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

			Tolerance			
			L	W	H	
			±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015		NAME	DATE	 Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com		
		DRAWN	R.P.			15.03.25
		CHECK	S.P.			15.03.25
		APPROVED	M.K.			15.03.25
DWG. NO. OIM-0002		PROJECTION: FIRST ANGLE  		TITLE: Insulated Multi-Tap Connectors Dual Sided Entry		
MATERIAL Refer Note		SIZE A3		Cat Id. 60004A - 63010B-14		
FINISH Refer Note				REV		
				DO NOT SCALE DRAWING		
				SHEET 4 OF 10		