

F

E

D

C

B

A

F

E




D

C

B

A

Catalog Id				Wire Range	No. of Port	Dimensions			Hex Size	Torque (In-lbs)	Note: - Insulated With High Dieelectric Access Plastisol - Dual Rated For Copper And Aluminum Conductors - Wire Range: 750Kcmil-14 - UL486 A/B Listed For Wire Connectors - Cold Temperature Rated Up To -45°C - Pre-Filled With Oxide Inhibitor Prevents Oxidation Moisture And Contaminats From Entering Area - Supplies With Removable Access Plugs - Black Insulation Is UV Resistant - Insulation UV Stablized & Listed To UL94 With V0 Flammability - Suitable For USe In Panel Boards, Cable Entry, Duct And Troughs - Standard Finish Black/Clear - Available In Colors : Black, Clear, Blue, Gray
Part No.	Part No.(Clear)	Part No.(Blue)	Part No.(Gray)			L	W	H			
60010AM	60010AMC	60010AM-BL	60010AM-GR	750Kcmil-2 Str	02	10.00 [254.00]	3.08 [78.23]	3.20 [81.28]	3/8	443	
64073	64073C	64073-BL	64073-GR	750Kcmil-2 Str	03	12.50 [317.50]					
64074	64074C	64074-BL	64074-GR	750Kcmil-2 Str	04	15.00 [381.00]					
64075	64075C	64075-BL	64075-GR	750Kcmil-2 Str	05	17.50 [444.50]					
64076	64076C	64076-BL	64076-GR	750Kcmil-2 Str	06	20.00 [508.00]					
64077	64077C	64077-BL	64077-GR	750Kcmil-2 Str	07	22.50 [571.50]					
64078	64078C	64078-BL	64078-GR	750Kcmil-2 Str	08	25.00 [635.00]					
64079	64079C	64079-BL	64079-GR	750Kcmil-2 Str	09	27.50 [698.50]					
64080	64080C	64080-BL	64080-GR	750Kcmil-2 Str	10	30.00 [762.00]					
64081	64081C	64081-BL	64081-GR	750Kcmil-2 Str	11	32.50 [825.50]					
64082	64082C	64082-BL	64082-GR	750Kcmil-2 Str	12	35.00 [889.00]					
62083	62083C	62083-BL	62083-GR	750Kcmil-2 Str	13	37.50 [952.50]					
62084	62084C	62084-BL	62084-GR	750Kcmil-2 Str	14	40.00 [1016.00]					

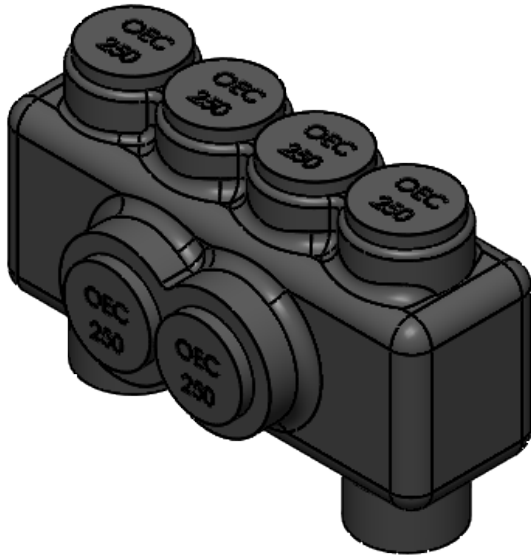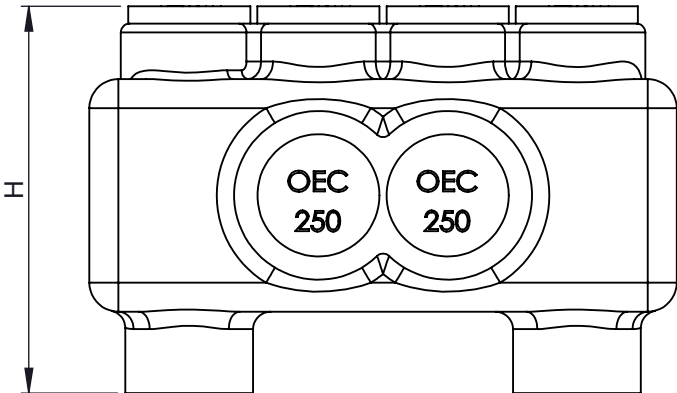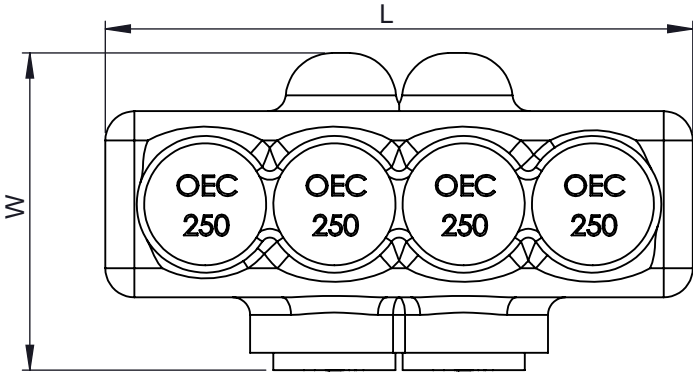

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

Tolerance			
L	W	H	
±0.50	±0.50	±1.0	
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±.015 TRUE C.L. ±.015 3 PL. DEC. ±.015 ANGLES ±.015	NAME	DATE	OEC Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com
	DRAWN	R.P.	15.03.25
	CHECK	S.P.	15.03.25
	APPROVED	M.K.	15.03.25
DWG. NO. OIM-0003	PROJECTION	FIRST ANGLE	SIZE A3
MATERIAL Refer Note			TITLE: Insulated Multi-Tap Connectors Single Sided Entry With Mounting
FINISH Refer Note			Cat Id. 60010AM - 64084 DO NOT SCALE DRAWING
			REV
			SHEET 10 OF 10