

F

F

E

E

D

D

C

C

B

B

A

A

8		7			6			5			4		3		2		1			
Catalog Id		Conductor			Stud Size	Dimensions								Color Code	Installation Tooling					
Without Flared Barrel (Fig-1)	With Flared Barrel (Fig-2)	AWG	Flex Conductor G,H,I,K,M & DLO	Expanded Cod. Range		OD	L	B	A	W	T	Ø F	E		Burndy Model - Y35, Y39, Y750, PAT750, PAT750LI	Ilscos ILC-12-N, ILC-12-H-N, ILCB-12		Huskie Model - EP-510C Die Index		Greenlee HK1240
98024NT	F98024NT	#3/0	#2/0	#3/0 - #2	1/4	0.62 [15.80]	2.36 [60.00]	0.98 [25.00]	1.06 [27.00]	0.62 [15.80]	0.12 [3.20]	0.25 [6.40]	0.47 [12.00]	Orange	U27RT	ILD-10	ILD - 50	HT41BA	KC12-3/0	Burndy Dieless - PAT444S & PAT4PC834LI.
98025NT	F98025NT				5/16	0.62 [15.80]	2.36 [60.00]	0.98 [25.00]	1.06 [27.00]	0.62 [15.80]	0.12 [3.20]	0.33 [8.40]	0.47 [12.00]							Ilscos Dieless -IDT-6, IDT-6H, IDTB-6, IDTB-6-LIO, TB-6Df1000-P, IDT-12-N, IVTB-6.
98026NT	F98026NT				3/8	0.62 [15.80]	2.36 [60.00]	0.98 [25.00]	1.06 [27.00]	0.62 [15.80]	0.12 [3.20]	0.41 [10.50]	0.47 [12.00]							Greenlee & NSI Dieless - HK12ID, EK12IDL, N12ID.

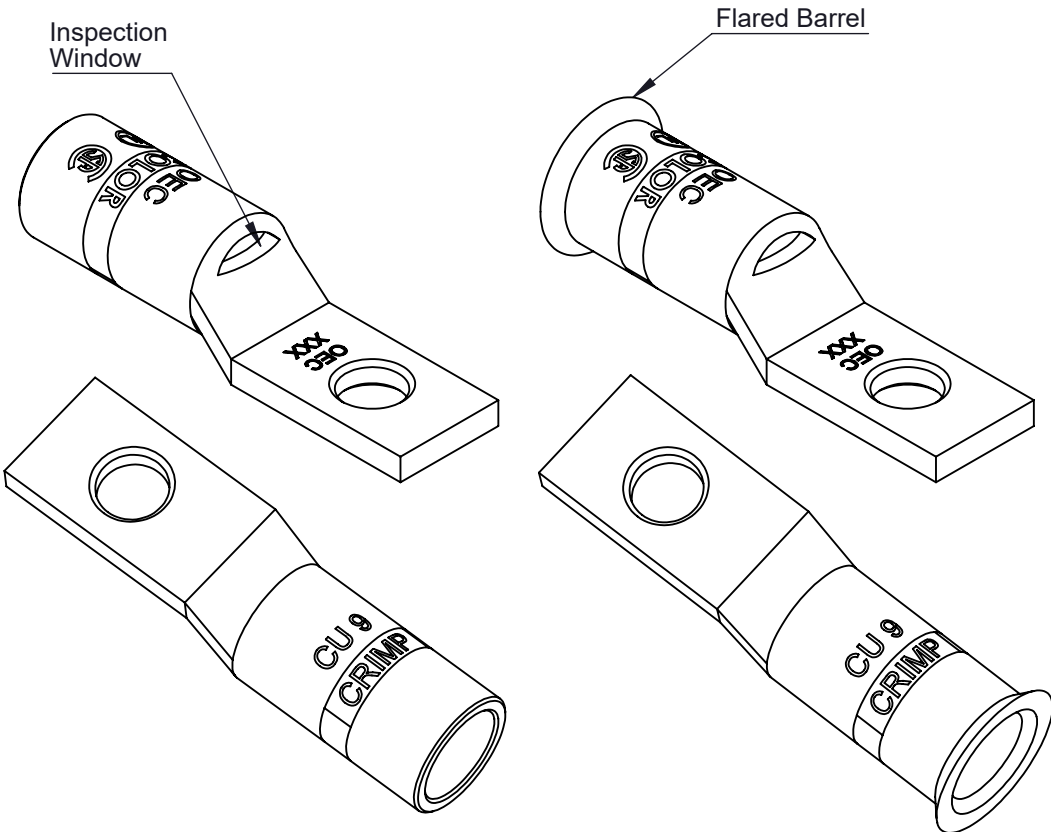
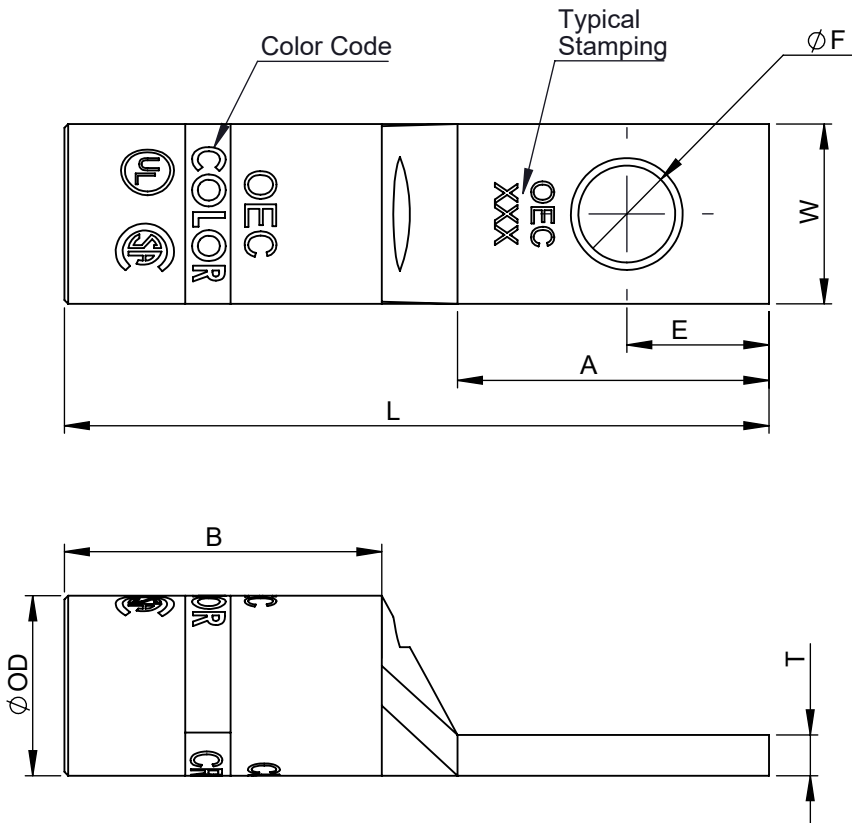


Fig-1



Fig-2

- Note:
- Manufactured from high strength seamless Copper tubing
 - Color coded die index and crimp marks
 - Electro-Tin plated for corrosion resistance
 - Pre-filled with oxide inhibitor and capped with color coded cap.
 - UL486A/B Listed for Wire Connectors
 - UL Listed and CSA Certified with competitor's compression tools
 - Listed for use with class B & C, flex class G, H, I, K, M & DLO cable

Crimping Instructions

- Select the proper lug or splice connector for the size of cable being installed, ensuring that the size matches the description in the table.
- Strip the insulation from the cable to a length so that the stripped area of the cable can be completely inserted into and fill the barrel of the lug or splice. Carefully strip the insulation from the cable without nicking the strands.
- Clean the stripped portion of the cable to remove oxide films.
- The stripped portion of the cable must be clean and inserted completely into the connector barrel.
- Using the tool and die combination specified for that connector in the table above, install crimps, leaving a space of 1/8 inch minimum between successive crimps.
For Short Barrel Connectors, apply 1 crimp,
For Long Barrel Connectors, apply 2 crimps on the color coded bands

THE INFORMATION CONTAINED WITHIN THIS DOCUMENT IS PROPRIETARY TO OEC AND MAY NOT BE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT

		TOLERANCE					
		OD	L	B	A	W	Ø F
		±0.20	±1.0	±0.50	±0.50	±1.0	±0.20
TOLERANCES-UNLESS OTHERWISE SPECIFIED 2 PL. DEC. ±0.15 TRUE C.L. ±0.15 3 PL. DEC. ±0.15 ANGLES ±0.15			NAME	DATE	<div> Usa Inc. 106 Northfield Avenue, Edison, NJ 08837, Phone: +1 732-479-0469 www.oec-americas.com</div>		
		DRAWN	R.P.	14.02.25			
		CHECK	S.P.	14.02.25			
		APPROVED	M.K.	14.02.25			
DWG. NO. OC-0002		PROJECTION: FIRST ANGLE		SIZE A3		TITLE: Copper One Hole Standard Barrel Compression Lug Narrow Tang	
MATERIAL Refer Note							
FINISH Refer Note							
		Cat Id. 98024NT - NT98026NT				REV	
		DO NOT SCALE DRAWING				SHEET 7 OF 17	