

Series E® Set Screw Aluminum Conduit Body with Cover and Gasket (EMT) Type LR

Features

- Set screw LR type with cover and gasket
- Hubs
- Suitable for use in concrete
- Suitable for use in wet locations

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die-cast
- Cover: Stamped aluminum
- Screw: Steel
- Gasket: Neoprene rubber

Standard Finish


- Premium epoxy powder coated

Certification

- UL® listed (E520149)
- NEMA 3R
- 2020 NEC® compliant



LISTED
OUTLET BOX
E520149

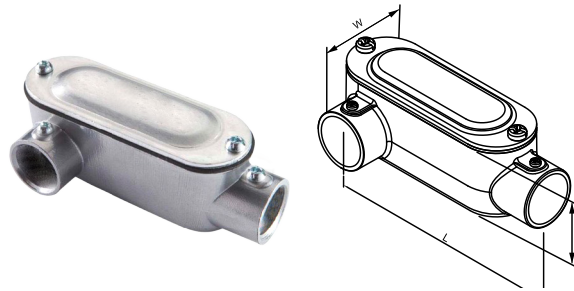

Catalog ID	Trade Size	Conductor Size		Dimensions In Inches			Volume In³
		Max Number	Max Size	L	W	H	
ELR050SSCG	1/2	1	6 AWG	4.39	1.91	1.58	4.30
ELR075SSCG	3/4	2	6 AWG	5.17	2.23	1.79	7.30
ELR100SSCG	1	3	6 AWG	6.00	2.48	2.14	12.3
ELR125SSCG	1-1/4	3	2 AWG	7.76	3.42	2.72	32.3
ELR150SSCG	1-1/2	3	2 AWG	7.76	3.42	2.92	33.8
ELR200SSCG	2	3	2/0 AWG	9.85	4.00	3.49	71.3
ELR250SSCG	2-1/2	3	4/0 AWG	12.84	6.00	4.26	153.0
ELR300SSCG	3	3	250 MCM	12.84	6.00	4.90	182.5
ELR350SSCG	3-1/2	3	350 MCM	15.45	6.40	5.68	304.9
ELR400SSCG	4	4	350 MCM	15.45	6.40	5.75	308.0

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

Series E® Set Screw Aluminum Conduit Body (EMT) Type LR

Features

- Set screw LR type
- Hubs
- Suitable for use in concrete

Applications

- Provides access to conductors for pulling, splicing and maintenance

Standard Material

- Copper free aluminum die-cast
- Screw: Steel

Standard Finish


- Premium epoxy powder coated

Certification

- UL® listed (E520149)
- NEMA 3R
- 2020 NEC® compliant



LISTED
OUTLET BOX
E520149

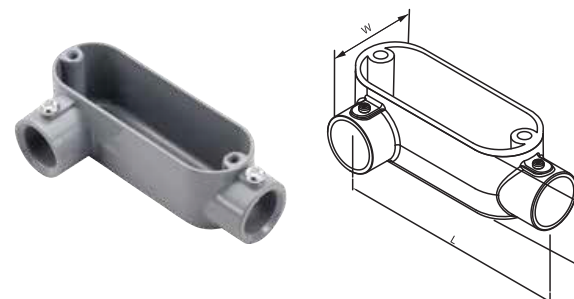

Catalog ID	Trade Size	Conductor Size		Dimensions In Inches			Volume In³
		Max Number	Max Size	L	W	H	
ELR050SS	1/2	1	6 AWG	4.39	1.91	1.34	4.30
ELR075SS	3/4	2	6 AWG	5.17	2.23	1.54	7.30
ELR100SS	1	3	6 AWG	6.00	2.48	1.89	12.3
ELR125SS	1-1/4	3	2 AWG	7.76	3.42	2.48	32.3
ELR150SS	1-1/2	3	2 AWG	7.76	3.42	2.68	33.8
ELR200SS	2	3	2/0 AWG	9.85	4.00	3.25	71.3
ELR250SS	2-1/2	3	4/0 AWG	12.84	6.00	4.00	153.0
ELR300SS	3	3	250 MCM	12.84	6.00	4.66	182.5
ELR350SS	3-1/2	3	350 MCM	15.45	6.40	5.43	304.9
ELR400SS	4	4	350 MCM	15.45	6.40	5.51	308.0

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)